



DURA PRODUCTS
Technology with Lasting Value

PO Box 380 | 504 Demoss Ave | Arcadia, IN 46030
855-502-3872 | www.DuraProducts.com



2018



DURA PRODUCTS
Technology with Lasting Value

MASTER CATALOG
2018



DURA PRODUCTS

Technology with Lasting Value

Dura Products is an Indiana based manufacturer of state-of-the-art metering, pumping and dispensing systems. All products are manufactured right here in America's heartland and are distributed globally through a wide network of approved distributors. Founded by owners with decades of knowledge in farming and the chemical sales industry, Dura Products prides itself on innovative, versatile and durable designs with the end customer always in mind.



DURA PRODUCTS

Technology with Lasting Value

PO Box 380 | 504 Demoss Ave | Arcadia, IN 46030
855-502-3872 | www.DuraProducts.com



Visit www.DuraProducts.com for full disclosure of terms and conditions.

ORDERING: Call (855) 502-3872, fax (317) 984-7868 or email CustomerService@DuraProducts.com. All orders received by 1:00 p.m. Eastern Standard Time will be shipped that day unless the item is on back-order. If the item is on back-order, you will receive a call to discuss whether you want an alternate product or would prefer to wait.

SHIPPING: A full pallet (consisting of 25 systems) is delivered via a freight carrier. Incomplete pallets may be delivered via freight carrier, UPS Ground or FedEx Ground depending on which is the most economical for you. Shipping is FOB Arcadia, IN.

WARRANTY: All Dura Products equipment is covered by a two-year warranty from the date of manufacture. For warranty consideration, call (855) 502-3872 (DURA) to request a Return Goods Authorization (RGA) form and follow the instructions on the form to ship the item back for a warranty evaluation. Once the evaluation is complete (in approximately three weeks), the item will either: 1. Be repaired or replaced at no cost to you and returned, or 2. You will be contacted to discuss an item that is not covered by the warranty. We offer a fully functional repair department that can repair your non-warranty claim item or we can arrange to properly dispose of the item. Pumps sent in for warranty must have all hoses and nozzles detached from the pump. Drain and flush all pumps/units/meters of all liquids as best as you can. Each item **MUST** be placed in a tied garbage bag before being placed into a shipping container. **DO NOT** send hoses and nozzles in with pumps for repair. Shipping to and from the warranty repair center is the responsibility of the customer.





Stainless Steel RSV Dispense Coupler Threaded Liquid Vertical Outlet
DP-R5072 EPDM



Stainless Steel RSV Dispense Coupler Barbed Liquid Outlet
DP-R3713 EPDM



POLY RPV Dispense Coupler Barbed Liquid Outlet
DP-R3714 EPDM



Stainless Steel RSV Fill Coupler
DP-R4027 EPDM



DEF Dura-Meter™ Face Plate
DP-MFP01-D



DEF Stainless Auto Shut-Off Nozzle with Stainless Steel Spout and Swivel
DP-N4001



DEF Poly Auto Shut-Off Nozzle with Stainless Steel Spout and Swivel
DP-N4005



DEF POLY Manual Nozzle with Stainless Steel Spout and Poly Swivel
DP-N4003



DEF Poly Manual Nozzle with Poly Spout
DP-N4006



DEF Dura-Pump™ Bottom Housing KIT with Bottom Gasket and Screws
DP-H4001A-E EPDM



Stainless Steel RSV Container Valve 2.5" x 5" Buttress Thread
DP-R4097-E EPDM



POLY RPV Container Valve 2.5" x 5" Buttress Thread
DP-R2682 EPDM



DEF Dura-Pump™ Gasket Kit
DP-G4001A-E EPDM



DEF Dura-Pump™ Cartridge KIT with O-Ring and Bottom Gasket
DP-P4017A-D



Tamper Evident Seals
DP-P5500 100 PACK
DP-P5501 10 PACK



6" IBC Cap with 2" Buttress Bung
DP-C4001B-E



6" IBC Cap with Manual Vented LID and 2" Buttress Bung
DP-C4004B-E



6" IBC Cap with Manual Vented LID and RPV Container Valve
DP-C4003B-E



6" IBC Cap with 2" NPT Bung
DP-C4009B-E



6" IBC Cap with Dual Action Vent
DP-C4010B-E



Stainless Steel RSV Container Valve TOOL Install/Removal
DP-R4084



Buttress to NPT Adapter 2" x 2"
DP-A4001



Easy Seal Dual Action Auto Vent 2" NPT
DP-V4002



DEF DOWN TUBE
55-Gallon Drum 32"Length DP-T4810
135-Gallon IBC Tote 22"Length DP-T3810
275-Gallon IBC Tote 37.8"Length DP-T4960
330- Gallon IBC Tote 45"Length DP-T4135



1" NPT TELESCOPING DOWN TUBE DP-T4001



DEF 135 GALLON TANK



DEF 275 GALLON TANK



DEF 330 GALLON TANK

"We use them for a tender. It allows my guys to load multiple products and work faster."

—Southern FS

"I've got six plumbed to an inductor. It works great, and saves me time when mixing batches."

—Don, CPS

"The system reduces human error and creates valuable efficiency for us."

—Peterson Farms, KY

DURA-ABS™ AUTO-BATCH SYSTEM



"Instinct® System
RECOMMENDED PUMP"

—Dow AgroSciences

"After a long season of spraying, we found that our herbicide tracking was more accurate by using the Auto-Batch System from Dura Products."

—Wright Tree Service



PREMIUM HIGH-FLOW AG CHEMICAL TRANSFER SYSTEMS

UP TO
15GPM

The industry's **only** transfer system offering an **automated** dispensing option



DURA-ABS™ AUTO-BATCH SYSTEM

- / Intuitive interface allows for the selection of manual or automatic operation with the flip of a switch
- / High-flow pump with up to 15GPM/56LPM flow rate
- / Optimized for repeatable batching; returns to the last volume amount dispensed
- / 100% moisture sealed circuitry
- / Includes Dura-Meter™ with impact resistant Lexan™ faceplate
- / Available in 12 Volt or 110 Volt, and EPDM, Viton®, or Silicone options
- / Includes a 2-year warranty
- / Measures in gallons, litres & ounces

HOW IT WORKS

- 1 Select the volume desired
- 2 Press START
- 3 The pump will begin to dispense fluid and automatically shuts off when complete.



DPABS-4312 12 Volt | DPABS-4315 110 Volt
(Available in EPDM, Viton®, or Silicone)

Must specify EPDM (product # and E), Viton® (product # and V), or Silicone (product # and S) when ordering. Always turn pump off and disconnect system from power when not in use.



DEF DURA-PUMP™

- / High-Flow pump with up to 15GPM/56LPM free flow rate and 10+GPM/40+LPM with 3/4" discharge hose and nozzle
- / Self-priming diaphragm pump with internal bypass
- / Motor thermally protected from overheating
- / 30-minute duty cycle
- / Suction port has 2" Male NPT and 1" Female NPT
- / Pump is easily field serviceable
- / 10-minute auto-shut off available (110V only)
- / Includes 2-Year warranty

DEF-2012E 12 Volt | DEF-2015E 110 Volt

DEF DURA-METER™

- / Made of impact resistant Lexan™ faceplate
- / 100% moisture-sealed circuitry
- / Same great menu driven backlit display
- / Plumbed for both in-line and 90 degree applications
- / Includes 2-Year Warranty

DP-3000D

Specifications

Operating Temp	-10°F to 130°F, -23°C to 54°C
Flow Rate	2 to 22GPM, 4 to 44LPM
ISO22241-3 Compliant	Yes
Meter Accuracy	+ / - .5%
Maximum Pressure	40 PSI
Wetted Materials	Polypropylene; 304 Stainless Steel; Ryton; EPDM seals



Specifications

Check Valve	Internal; EPA 165.45 compliant
Vertical Suction Lift	Self-priming to 10ft, 3m
Power Cord	12 Volt: 20ft, 6m; 110 Volt: 6.5ft, 2m
Motor	1/4 HP, 186W
Amps	12 Volt: 18.5; 110 Volt: 2.0
Suction Port	2" Male and 1" Female NPT thread
Discharge Port	1" Female NPT thread
ISO22241-3 Compliant	Yes
Wetted Materials	Polypropylene; Santoprene; 304 Stainless Steel; EPDM seals

DEF DURA-PUMP™ 135 PORTABLE TOTE



ALL-IN-1

COMPLETE SYSTEM to TRANSPORT, DISPENSE & STORE DIESEL EXHAUST FLUID

Pumping System Contains	
135 Gallon Tote	Specially designed to maintain the strictest purity of DEF
Pump System	ISO/EPA compliant DEF Easy Caddy pumping system
Coupler	RPV; MicroMatic
Discharge Hose	3/4" x 20ft, 6m
Suction Hose	3/4" x 1.5ft, 0.5m
Lid	6"; Vented
Nozzle	Manual or Automatic
Meter	DEF Dura-Meter™ (optional)
Other	All hose clamps and fittings

/ Includes 2-Year Warranty

MANUAL Nozzle	AUTOMATIC Nozzle
DEFE-2512ME-135 12 Volt	DEFE-2512AE-135 12 Volt
DEFE-2515ME-135 110 Volt	DEFE-2515AE-135 110 Volt

DEF Dura-Meter™ DP-3000D (sold separately)



LIMITLESS APPLICATIONS

Use individual units for simple applications

Use multiple units to create an automated process for dispensing into an inductor cone



DEF DURA-PUMP™ TOP UNLOAD



DURA-METER™

- / Made of impact resistant Lexan™ faceplate
- / 100% moisture-sealed circuitry
- / Menu driven backlit display
- / Plumbed both for in-line and 90-degree applications
- / Includes 2-Year Warranty



DP-3000E EPDM | DP-3000V Viton® | DP-3000S Silicone

Must specify EPDM (product # and E), Viton® (product # and V), or Silicone (product # and S) when ordering.

Specifications	
Operating Temp	-10°F to 130°F, -23°C to 54°C
Flow Rate	2 to 22GPM, 7.5 to 83LPM
Meter Accuracy	+ / - .5%
Backlit Display	Yes
Maximum Pressure	40 PSI
Wetted Materials	Polypropylene; 304 Stainless Steel; Ryton; EPDM, Viton®, or Silicone seals

Special Features

- / Extended battery life with use of 4 "AAA" batteries
- / Faceplate over-molded with Santoprene and filled with gel for improved shock resistance

Customer should always check calibration before use



/ Includes 2 Year Warranty

Pumping System Contains	
10+ GPM Pump	High-Flow Dura-Pump™
Coupler	RSV; MicroMatic with RSV model
Downtube	1" Telescoping with non-RSV model
Nozzle	Manual or Automatic
Discharge Hose	3/4"x 20ft, 6m
Meter	DEF Dura-Meter™ (optional)
Other	All hose clamps and fittings

Meter, totes, drums, lid and container valves sold separately



Without RSV Coupler	
MANUAL Nozzle	AUTOMATIC Nozzle
DEFT-2012ME 12 Volt	DEFT-2012AE 12 Volt
DEFT-2015ME 110 Volt	DEFT-2015AE 110 Volt

DEF Dura-Meter™ DP-3000D (sold separately)

With RSV Coupler	
MANUAL Nozzle	AUTOMATIC Nozzle
DEFT-2412ME 12 Volt	DEFT-2412AE 12 Volt
DEFT-2415ME 110 Volt	DEFT-2415AE 110 Volt

DEF Dura-Meter™ DP-3000D (sold separately)



DEF DURA-PUMP™ EASY CADDY TOP SUCTION

For totes with RPV type valve



TOP MOUNT
Easy Caddy secured
on top of a 330 tote
and 135 tote



Pumping System Contains	
10+ GPM Pump	High-Flow Dura-Pump™
Coupler	RPV; MicroMatic
Discharge Hose	3/4" x 20ft, 6m
Suction Hose	3/4" x 1.5ft, 0.5m
Nozzle	Manual or Automatic
Meter	DEF Dura-Meter™ (optional)
Other	All hose clamps and fittings

/ Includes 2-Year Warranty

MANUAL Nozzle	AUTOMATIC Nozzle
DEFE-2512ME 12 Volt	DEFE-2512AE 12 Volt
DEFE-2515ME 110 Volt	DEFE-2515AE 110 Volt

DEF Dura-Meter™ DP-3000D (sold separately)

Meter, totes, drums, lid and
container valves sold separately



DURA-PUMP™

- / High-Flow with up to 15GPM/56LPM flow rate
- / Self-priming diaphragm pump with internal by-pass
- / Motor thermally protected from overheating
- / 30-minute duty cycle
- / Suction port has 2" Male NPT and 1" Female NPT
- / Pump is easily field serviceable
- / Includes 2-Year Warranty


DP-4012 12 Volt | DP-4015 110 Volt

(Available in EPDM, Viton®, or Silicone)

Must specify EPDM (product # and E),
Viton® (product # and V), or Silicone (product # and S) when ordering.
Always turn pump off and disconnect system from power when not in use.

Specifications

Check Valve	Internal; EPA 165.45 compliant
Vertical Suction Lift	Self-priming to 10ft, 3m
Power Cord	12 Volt: 20ft, 6m; 110 Volt: 6.5ft, 2m
Motor	1/4 HP, 186W
Amps	12 Volt: 18.5; 110 Volt: 2.0
Suction Port	2" Male and 1" Female NPT thread
Discharge Port	1" Female NPT thread
Wetted Materials	Polypropylene; Santoprene; EPDM, Silicone, or Viton® seals; 304 Stainless Steel

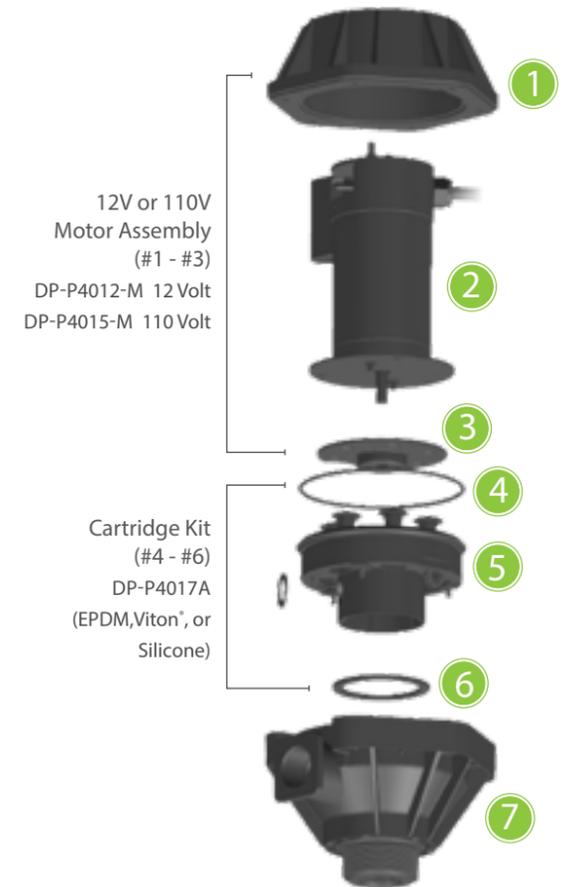

12V or 110V
Motor Assembly
(#1 - #3)
DP-P4012-M 12 Volt
DP-P4015-M 110 Volt

Cartridge Kit
(#4 - #6)
DP-P4017A
(EPDM, Viton®, or
Silicone)

- Upper Housing
DP-P4002A
- 12V or 110V Motor
- Drive Plate DP-P4013A
- O-ring
DP-P4004AO (EPDM, Silicone or Viton®)
- Cartridge
DP-P4017A (EPDM, Silicone or Viton®)
- Bottom Gasket
DP-P4001AG (EPDM, Silicone or Viton®)
- Bottom Housing
DP-H4001A (EPDM, Silicone or Viton®)



DURA-PUMP™ EASY CADDY

1



SIDE MOUNT
Easy Caddy secured
on side of tote

The Easy Caddy system is our **top selling** and the industry's **most versatile** chemical transfer system



Pumping System Contains	
Pump	High-Flow Dura-Pump™
Suction Hose	1" x 5ft, 1.5m
Discharge Hose	1" x 12ft, 3.6m
Nozzle	Ball valve
Camlock	2"
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples



PREMIUM HIGH-FLOW DEF DISPENSING SYSTEMS



PORTABLE DEF STORAGE SOLUTIONS

DURA PRODUCTS AG CHEMICAL CHART

COMPOUND	EPDM	Viton*	Silicone	COMPOUND	EPDM	Viton*	Silicone
2,4-D Ester		☒		Lexar® EZ	☒		
Accord & Accord XRT II	☒	☒	☒	Liberty		☒	
Atrazine	☒	☒		Lorsban 4E		☒	
Balance Flexx	☒	☒		Lorsban Advanced		☒	
Callisto® 480SC	☒			Lumax® EZ	☒		
Cappreno	☒	☒		Matador		☒	
Degree Xtra®	☒	☒		Max-In® Ultra ZMB	☒	☒	
Dicamba/Xtendimax	☒			MSO, Crop Oil, Oil Based		☒	
DiFlex Duo	☒	☒		Nitrogen based		☒	
Duramax, Durango	☒	☒	☒	N-Serve 24		☒	
Engenia	☒			Parity		☒	
Enlist Duo	☒	☒	☒	Prosaro	☒	☒	
EverGol	☒	☒		RAXILPro	☒	☒	
Foliars		☒		Rely 280	☒	☒	
ForeFront	☒			Resicore			☒
FulTime® NXT		☒		Roundup®	☒	☒	
Fungicides		☒		Shredder™ E-99		☒	
Garlon 3A	☒		☒	Stratego	☒		
Gaicho 600	☒	☒		Stratego YLD	☒		
Gramoxone/Paraquat		☒		Stylet-Oil		☒	
Grazon P+D	☒			SureStart® & SureStart II			☒
GrazonNext	☒			Surpass EC	☒		☒
Halex® GT	☒			Tacoma		☒	
Huskie		☒		TopNotch	☒		
Instinct®			☒	Tordon 22K	☒		
Keystone			☒	Warrant/Paraquat		☒	
Keystone LA			☒	Wolverine AdVANCED		☒	
Laudis	☒	☒					

The Dura Products Chemical Compatibility Chart should be considered as a guide only due to the many variables which may affect the compatibility of materials. This guide is based on the most recent information obtained from a variety of suppliers and chemical producers and is believed to be accurate. Actual decisions on materials used need to be tested and evaluated by the customer for each specific application. The responsibility of proper chemical compatibility of equipment and material used is the full responsibility of the customer. Dura Products does not warrant product damaged by non compatibility.

For a more comprehensive listing of chemicals, please visit our website at www.DuraProducts.com

For help with the proper selection of pump for your application needs, please call 855-502-3872

SYSTEM



TOP MOUNT
Easy Caddy secured on top of tote



GROUND
Easy Caddy used from the ground

USE IT

- / The Easy Caddy can be mounted in six different configurations on a variety of tank/tote and drum types
- / Use it mounted on top of a tank or on top of a 55-gallon drum, on the side of tank, or off the ground depending on user preference
- / Conversion kits are available to mount a system on Monsanto or Snyder type tanks (see pg.15)
- / Includes 2 Year Warranty



SNYDER TANK
Easily converted to a GEM Cap

MONSANTO TANK
Easily converted to a MTS

WITH Meter	WITHOUT Meter
DPEM-4312 12 Volt	DPE-4012 12 Volt
DPEM-4315 110 Volt	DPE-4015 110 Volt

(Available in EPDM, Viton*, or Silicone)

Must specify EPDM (product # and E), Viton* (product # and V), or Silicone (product # and S) when ordering. Always turn pump off and disconnect from power when not in use.

Tanks/Totes/Drums sold separately.

6 WAYS

DURA-PUMP™ EASY CADDY CONVERSION KITS

For Use On MONSANTO TANK MTS Easy Caddy Conversion Kit DP-AK0008



Begin with the Dura Easy Caddy



Remove Dura-Pump™ from Easy Caddy frame

For Use On SNYDER TANK GEM Cap Easy Caddy Conversion Kit DP-AK0009



Begin with the Dura Easy Caddy



Remove Dura-Pump™ from Easy Caddy frame

For Recirculation On IBC/TOTE Recirculation Kit DP-AK0007



Begin with the Dura Easy Caddy



Add Recirculation Kit DP-AK0007

For Use On 55-GALLON DRUM 1" NPT Telescoping Downtube DP-T4001



Begin with the Dura Easy Caddy



Remove Dura-Pump™ from Easy Caddy frame



AG Dura-Pump™ Gasket Kit
DP-G4001A-E EPDM
DP-G4001A-V Viton®
DP-G4001A-S Silicone



AG Dura-Pump™ Bottom Housing Kit with Bottom Gasket and Screws
DP-H4001A-E EPDM
DP-H4001A-V Viton®
DP-H4001A-S Silicone



AG Dura-Pump™ Cartridge KIT with O-Ring and Bottom Gasket
DP-P4017A-E EPDM
DP-P4017A-V Viton®
DP-P4017A-S Silicone



AG Dura-Meter™ Chemical Face Plate
DP-MFP01



AG Dura-Meter™ Body
DP-PMB3000E EPDM
DP-PMB3000V Viton®
DP-PMB3000S Silicone



Female Coupling DRY Poppet for N-Serve Systems
DP-C4010N



Tamper Evident Seals
DP-P5500 100 PACK
DP-P5501 10 PACK



2" Camlock
DP-NF20CL



MTS Camlock
DP-M4001



Easy Seal Dual Action Auto Vent 2" NPT
DP-V4002



5 Gallon Calibration Jug
DP-J4001



1" Ball Valve Nozzle
DP-NF4002



1" Replacement T-Handle
DP-NF4004



Buttress to NPT Adapter-2" x 2"
DP-A4001



2" x 1" Buttress Manual Vent
DP-V4001-B
DP-V4001-NPT



Recirculation Kit for Easy Caddy and Quick Caddy
DP-AK0007



6" IBC Cap with 2" Buttress Bung
DP-C4001B-E



6" IBC Cap with Dual Action Vent
DP-C4010B-E



6" IBC Cap with 2" NPT Bung
DP-C4009B-E



6" IBC Cap with Manual Vented Lid and 2" Buttress Bung
DP-C4004B-E

1" NPT Telescoping Downtube (also used for Easy Caddy Conversion on 55-Gallon Drum) DP-T4001



MTS Easy Caddy Conversion Kit
DP-AK0008



GEM cap Easy Caddy Conversion Kit
DP-AK0009



AG 135-Gallon Chemical Cage Tank



AG 275-Gallon Chemical Cage Tank

Tanks available upon request

DURA-LOAD STATION™

- / Reduction of agriculture sprayer load time by 75%
- / Payback of initial investment in less than 20-25 spraying days
- / With our 3" Dura-Load Station™, you can load a 1,000 gallon sprayer with up to 4 chemicals in 5 minutes
- / Electric valves allow for rapid injection of the product into the fill line with the flip of a switch
- / Optimized for repeatable batching; returns to the last volume amount dispensed



Load Station Contains	
Output Pump	3" Banjo Wet Seal Honda Motor
Fluid Inputs	Four (4) chemical
Input Pumps	Four (4) AG chemical 15GPM Dura-Pumps™
Inductor Valve	Electric
Operator Panel	Four (4) digital Dura-Meters™ OR Four (4) digital Auto-Batch Systems (ABS)
Tanks	Three (3) stainless steel: 70-, 30- and 15-gallon
Other	All hose clamps, barbs and nipples

WITH Dura-ABS	WITHOUT Dura-ABS
DP-LS-ABS	DP-LS

(Available in EPDM, Viton®, or Silicone)



Add MTS Kit DP-AK0008 (found on page 15)



Dura MTS Kit DP-AK0008 installed on Monsanto tank



Add GEM Cap Kit DP-AK0009 (found on page 15)



Dura GEM Cap Kit DP-AK0009 installed on Snyder tank



Dura Recirculation Kit DP-AK0007 installed on IBC/TOTE (found on page 15)



Add DP-T4001: 1" NPT Telescoping Downtube (found on page 15)



DP-T4001: 1" NPT Telescoping Downtube installed on 55-Gallon Drum



DURA-PUMP™ SPECIALTY SYSTEMS

DURA-PUMP™ QUICK CADDY



- / Our premium highly portable system with built-in carry handle and rugged frame
- / For use in multiple mounting applications both on top of tote and ground adaptable
- / Includes 2-Year Warranty

WITH Meter	WITHOUT Meter
DPQM-4312 12 Volt	DPQ-4012 12 Volt
DPQM-4315 110 Volt	DPQ-4015 110 Volt

(Available in EPDM or Viton*)
Must specify EPDM (product # and E) or Viton* (product # and V) when ordering.



Pumping System Contains	
Pump	High-Flow Dura-Pump™
Suction Hose	1" x 5ft, 1.5m
Discharge Hose	1" x 12ft, 3.6m
Nozzle	Ball valve
Camlock	2"
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples



For use with Monsanto tanks

MONSANTO TANK

WITH Meter	WITHOUT Meter
DPMTSM-4312 12 Volt	DPMTS-4012 12 Volt
DPMTSM-4315 110 Volt	DPMTS-4015 110 Volt

(Available in EPDM or Viton*)
Must specify EPDM (product # and E) or Viton* (product # and V) when ordering.

Pumping System Contains	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m
Camlock	MTS; direct attach to tote
Motor Bracket	Yes, rear
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples

/ Includes 2-Year Warranty

DURA-PUMP™ TOP UNLOAD



- / Top mount application with 2" NPT bung, 1" telescoping downtube to accommodate varying tank heights
- / Includes 2-Year Warranty

WITH Meter	WITHOUT Meter
DPTM-4312 12 Volt	DPT-4012 12 Volt
DPTM-4315 110 Volt	DPT-4015 110 Volt

(Available in EPDM or Viton*)
Must specify EPDM (product # and E) or Viton* (product # and V) when ordering.



Pumping System Contains	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m
Downtube	1" Telescoping
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples



For use with Snyder tanks with large 8" lid

SNYDER / GEM CAP TANK

WITH Meter	WITHOUT Meter
DPGEMM-4312 12 Volt	DPGEM-4012 12 Volt
DPGEMM-4315 110 Volt	DPGEM-4015 110 Volt

(Available in EPDM or Viton*)
Must specify EPDM (product # and E) or Viton* (product # and V) when ordering.

Pumping System Contains	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m
GEM Cap Lid	Spin collar; all plumbing assembled on pump
Motor Bracket	Yes; rear
Downtube	1" Telescoping
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples

/ Includes 2-Year Warranty

DURA-PUMP™ BOTTOM UNLOAD



- / Configured to be hard mounted at bottom of tank/tote
- / Includes 2-Year Warranty

WITH Meter	WITHOUT Meter
DPBM-4312 12 Volt	DPB-4012 12 Volt
DPBM-4315 110 Volt	DPB-4015 110 Volt

(Available in EPDM or Viton*)
Must specify EPDM (product # and E) or Viton* (product # and V) when ordering.



Pumping System Contains	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m
Camlock	2"; direct attach to tote
Motor Bracket	Yes, rear
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples



WITH Meter	WITHOUT Meter
DPEM-4612NV 12 Volt	DPE-4612NV 12 Volt
DPEM-4615NV 110 Volt	DPE-4615NV 110 Volt

Easy Caddy pumping system in Viton*

N-SERVE EASY CADDY

Pumping System Contains	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m; Premium XPLE
Suction Hose	1" x 5ft, 1.5m; Premium XPLE
Dry-Poppet Coupler	Available; sold separately (see right)
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs, nipples



Female Coupling Dry Poppet DP-C4010N sold separately

/ Includes 2-Year Warranty

N-SERVE BOTTOM UNLOAD



WITH Meter	WITHOUT Meter
DPBM-4312NV 12 Volt	DPB-4012NV 12 Volt
DPBM-4315NV 110 Volt	DPB-4015NV 110 Volt

Bottom Unload pumping system in Viton*

Pumping System Contains	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m; Premium XPLE
Motor Bracket	Yes; rear
Dry-Poppet Coupler	Available; sold separately (see right)
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs, nipples



Female Coupling Dry Poppet DP-C4010N sold separately

/ Includes 2-Year Warranty

Tanks/Totes/Drums are sold separately. Always turn pump off and disconnect from power when not in use.