

**NEW
FOR 2022**



DURA PRODUCTS

INTRODUCING OUR NEW 3" HIGH-FLOW DURA-METER™

- / Intuitive menu-driven backlit display
- / Impact resistant Lexan™ faceplate
- / 100% Moisture-sealed circuitry
- / 3" Manifold flanged meter body
- / Multiple plumbing options
- / Includes a 2-year Warranty & Maintenance Program



SPECIFICATIONS	
Nominal Size	3"
Model	Dura HFM 3
Batteries	(2) 9 Volt
Accuracy	+ / - 0.5%
Backlit Display	Yes
GPM	15 - 700
Wetted Materials	GF Polypropyl, Viton®, EPDM or Silicone seal, Sapphire

Special Features

- / Easily serviced
- / Extended battery life with use of (2) 9V batteries
- / Fluid flow initiates measurement
- / Versatile plumbing configurations
- / Displays batch and total volume
- / Gallons / Liters flow rate measurement

ORDERING INFORMATION		
DP-HFM3V Viton®	DP-HFM3E EPDM	DP-HFM3S Silicone


Must specify Viton® (product # and V), EPDM (product # and E), or Silicone (product # and S) when ordering.



www.DuraProducts.com
Arcadia, IN 46030 | (317) 984-4003

**NEW
FOR 2022**

3" HIGH-FLOW DURA-METER™

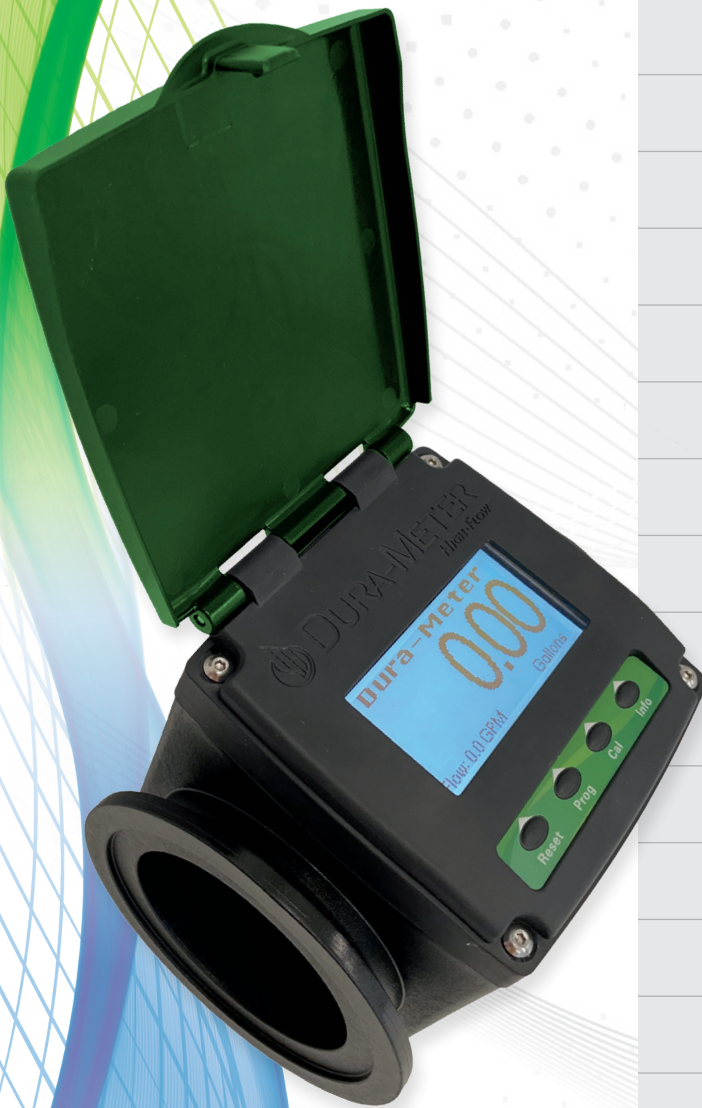

SPECIFICATIONS	
Nominal Size	3"
Model	DP-HFM3
Connection	M300 flange
Meter Accuracy	+/- 0.5%
Non-conductive Fluids	Yes
Fluid Flow Initiates Measurement	Yes
Batteries	(2) 9 Volt
Battery Life Indicator	Yes
Backlit Display	Yes
Minimum GPM	15
Maximum GPM	700
Minimum Temp	+ 32 °F
Maximum Temp	+ 140 °F
Battery Size/Voltage	9V
Meter Type/Style	Paddlewheel
Body Construction Material	GF Polypropyl
Paddle Bearing Construction Material	Sapphire
Straight Inlet Required *	30" *
Straight Outlet Required *	15" *
Field Calibration Capability *	Yes *

** Straight Inlet / Outlet Requirements can be significantly reduced with Meter Calibration to achieve +/- 0.5% Accuracy*



DURA PRODUCTS
Technology with Lasting Value
www.DuraProducts.com
Arcadia, IN 46030 | (317) 984-4003