




DURA PRODUCTS
Technology with Lasting Value



FASTBATCH
MULTIJET

Fast. Simple. Safe.™

Reduce fill times by up to 75%!*

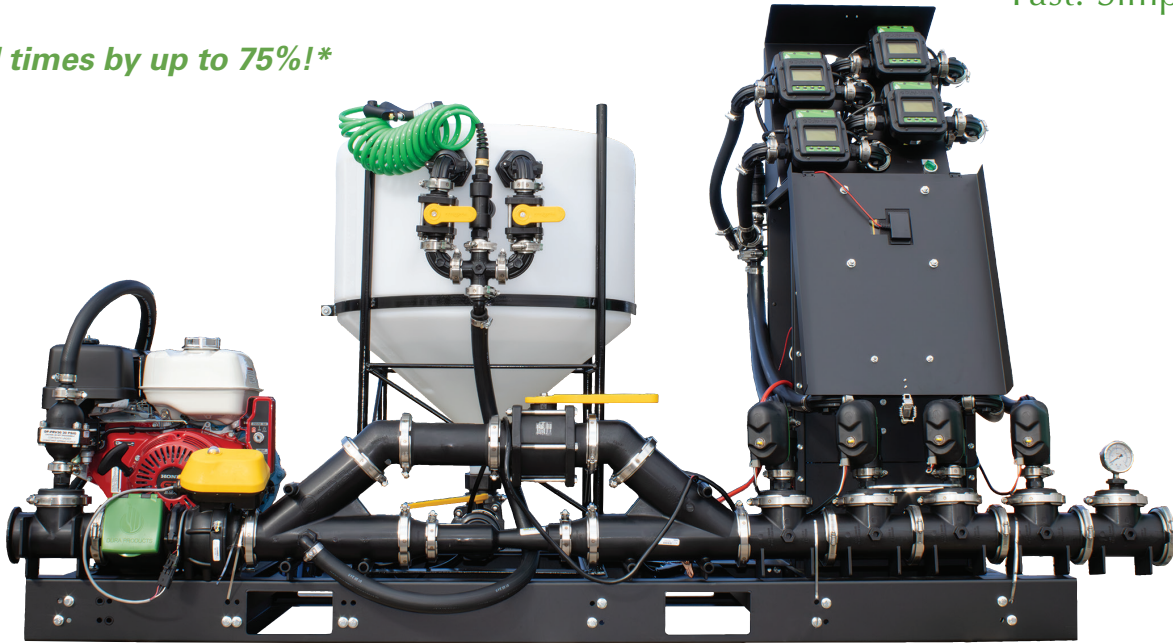

The Fastest, Simplest, Safest Way to Mix and Spray

Take your mixing and spraying operations to the next level with the FastBatch MultiJet system, designed with simultaneous direct injection to maximize productivity, streamline your workflow, and keep your team and crops safe.

Fast: Speed and Productivity

Spend less time waiting and more time spraying, helping you cover more ground and get the job done faster. The only sprayer fill system in the market that has the ability to recirculate your mix to keep chemicals in suspension.

Simple: Familiar and Reliable

User-Friendly Design: Built with trusted, high-quality, durable, familiar components and a straightforward operation, making it easy, even for operators new to the system.

Safe: Protect Your Crops, Team, and the Environment

Unmatched Accuracy: Precise mixing ensures every batch meets your specifications.

Worker Safety First: Reduce exposure risks with a system designed for operator safety.

* Based on standard cone/venturi systems with 4 bulk inputs taking 20 minutes (VOC) vs 5 minutes for the FastBatch Multijet

ORDERING INFORMATION

| PRODUCT # | DESCRIPTION |
|--------------------|---|
| DPFB-MULT2V4-12 | 2" 12VDC 4-Input Fastbatch Multijet System Viton® No Pump |
| DPFB-MULT3V4-12 | 3" 12VDC 4-Input Fastbatch Multijet System Viton® No Pump |
| DPFB-MULT2V2-12ADD | 2" 12VDC 2-Input Fastbatch Multijet Add-On |
| DPFB-MULT2V4-12ADD | 2" 12VDC 4-Input Fastbatch Multijet Add-On |
| DPFB-MULT3V2-12ADD | 3" 12VDC 2-Input Fastbatch Multijet Add-On |
| DPFB-MULT3V4-12ADD | 3" 12VDC 4-Input Fastbatch Multijet Add-On |

PART NUMBER TAXONOMY INFORMATION

| DPFB-MULT3V4-12 | DIGIT OPTION | DESCRIPTION |
|----------------------------|-----------------|--|
| DPFB-MULT <u>X</u> | 2 | 2" Plumbing |
| | 3 | 3" Plumbing |
| DPFB-MULT3 <u>X</u> | V | Viton® |
| | E | EPDM |
| DPFB-MULT3V <u>X</u> | 4 | 4 input version |
| DPFB-MULT3V4- <u>XX</u> | 12 | 12 volt DC |
| | 110 | 110 volt AC |
| DPFB-MULT3V4-12- <u>XX</u> | Add TP at end | Transfer Input with Honda® Engine and Silicon Carbide seal |
| | Add WSTP at end | John Blue® Transfer Input with Honda® Engine and Wet Seal |



Protective Meter Lid & Solar Panel



Dura 1" Electric Valves



Auto-Batch™ High-Flow Carrier System



40 Gallon Cone with chem knife and rinse



Dry Poppet Calibration Connections

SPECIFICATIONS

| SPECIFICATIONS | |
|---------------------------------|--|
| Main Plumbing Size | 2" or 3" |
| Meters | Auto-Batch™ High-Flow & Auto-Batch™ Meters |
| Voltage | 12 Volt DC |
| Connections | M100-M200-M300 Flanges |
| EV Open/Closed Indicator | Yes |
| Wiring | On/Off 3 Wire |
| Connector | 4 Pin Deutsch |
| Calibration Connection | Dry Poppets |
| Cone | 40 gallon w/chem knife & rinse set up |
| Maximum Pressure | 150 PSI |
| Storage Temp | -40° to 185° F (-40° C to 85° C) |
| Operating Temp | 32° to 158° F (0° C to 70° C) |
| Wetted Materials | Glass Filled Polypropylene, 304 & 316 Stainless Steel, PTFE & Carbon Graphite filled PTFE, EPDM, Viton™, Ryton™, Santoprene, PVDF Kynar™ |
| System Dimensions | 93" L x 37" W |



DURA PRODUCTS

Technology with Lasting Value

www.DuraProducts.com

Arcadia, IN 46030 | (317) 984-4003