


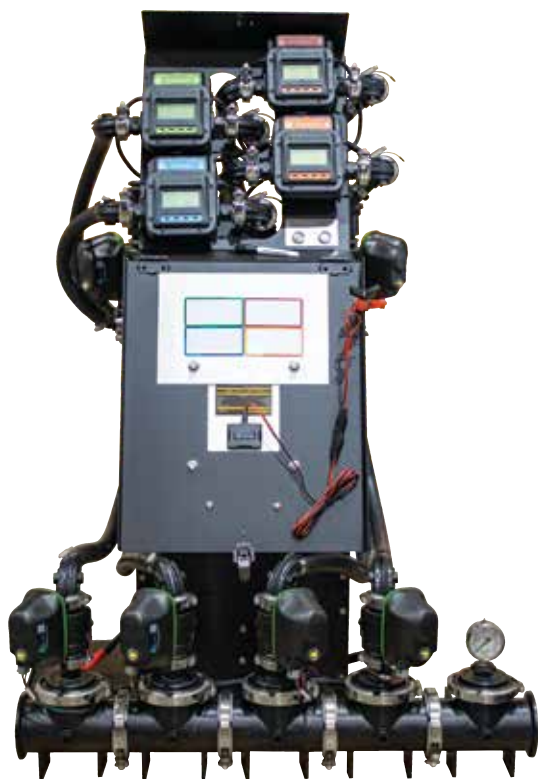

Optimized for Speed, Accuracy and Safety

Take your mixing and spraying operations to the next level with the **NEW** FastBatch™ DI PLUS system, *the only automated sprayer fill system with integrated chemical recirculation*, helping maintain product suspension while reducing manual handling and simplifying operation.

FAST.

- Precise mixing ensures every batch meets your specifications for unmatched accuracy.
- The only sprayer fill system with an integrated chemical recirculation preset that keeps chemical in suspension, ready to batch when you are.

SIMPLE.

- Updated, easy-to-use master controls
- New, simplified meter menu controls
- Reduced wiring complexity for a more reliable electrical system.

SAFE.

- Reduced exposure risks with completely closed system.
- Color-coded meter labels, magnetic labels, and valve handles for quick fluid identification and cross contamination prevention.

*Based on standard cone/venturi systems with 4 bulk inputs taking 20 minutes (VOC) vs 5 minutes for the FastBatch™ DI Plus.



*Reduce fill times by up to 75%!**

ORDERING INFORMATION	
PRODUCT #	DESCRIPTION
DPAB-DI2V-12RC	2" FastBatch DI Plus System 12V Viton® 4 Pump with recirculation
DPAB-DI2E-12RC	2" FastBatch DI Plus System 12V EPDM 4 Pump with recirculation
DPAB-DI3V-12RC	3" FastBatch DI Plus System 12V Viton® 4 Pump with recirculation
DPAB-DI3E-12RC	3" FastBatch DI Plus System 12V EPDM 4 Pump with recirculation

ORDERING INFORMATION	
PRODUCT #	DESCRIPTION
DPAB-DI2V-12RCADD	2" 12V Viton® 2-Pump FastBatch DI Plus Add-On with recirculation
DPAB-DI2E-12RCADD	2" 12V EPDM FastBatch DI Plus Add-On with recirculation
DPAB-DI3V-12RCADD	3" 12V Viton® 2-Pump FastBatch DI Plus Add-On with recirculation
DPAB-DI3E-12RCADD	3" 12V EPDM 2-Pump FastBatch DI Plus Add-On with recirculation

*Dura recommends the NOCO®, GenPro 10X1 charger to connect a 12V battery system for static 110V installation/operation.



Updated System Controls & Meter Menu Controls

- Master On/Off push button conveniently controls power to the entire system
- Recirculate button allows for recirculation of all fluids by a custom amount
- New simplified meter menu controls



Easy Visual Plumbing Connections

- Color-coded meter labels, magnetic labels, and valve handles for quick fluid identification and cross contamination prevention.
- Whiteboard for extra note taking.



Updated Integrated Recirculation System

- Automatically recirculate all fluids, by a custom amount, with the push of a button.
- Hoses can stay connected at all times, system is completely closed during batching and recirculation.
- Recirc button only works when meter is on "Main Menu" screen to prevent accidental operation.
- Recirculation can be stopped at any time by pushing "Stop" on meter(s) or by pushing the power button "OFF".



Ease of Use Improvements

- Frame modified for easier pump servicing.
- Reduced wiring complexity for a more reliable electrical system.

SPECIFICATIONS

Main Plumbing Size	2" or 3"
Meters	Auto-Batch™ Meters
Connections	M100-M220-M300 Flanges
Calibration Connection	Dry Poppets
Max Pressure Carrier Line	150 PSI
Max Pressure Chemical Meters	40 PSI
Storage Temp	-40° to 185° F (-40° C to 85° C)
Operating Temp	32° to 158° F (0° C to 70° C)
Wetted Materials	Glass Filled Polypropylene, 304 & 316 Stainless Steel, PTFE & Carbon Graphite filled PTFE, EPDM, Viton™, Ryton™, Santoprene, PVDF Kynar™
System Dimensions	38"L x 35"W x 53"H



DURA PRODUCTS

Technology with Lasting Value

www.DuraProducts.com

Arcadia, IN 46030 | (317) 984-4003