

1" & 1¼" DURA STAINLESS STEEL VALVE

The 1" and 1¼" Dura Electric Actuated Stainless Steel Ball Valves are engineered for reliable, accurate fluid control in agricultural, industrial, and OEM fluid-handling systems. Built with corrosion-resistant stainless steel and a high-performance electric actuator, this valve delivers fast response, long service life, and consistent operation in harsh environments.

Designed for applications requiring automation, repeatability, and safety, Dura electric ball valves are trusted in chemical transfer, direct injection, batching systems, sprayers, nurse trailers, and industrial process control.



DPEV-1SS



DPEV-125SS



DURABLE

- **Engineered for Excellence:** Our valves are designed for optimal actuation. The internal components are carefully selected to ensure long operational life and superior performance for both the valve and actuator.
- **Waterproof Actuator Housing**
- **Corrosion-Resistant Stainless Steel Construction:** Ideal for chemicals, fertilizers, DEF, water and other aggressive fluids.
- **2 Year Warranty**

EASY TO USE

- **Physical Indicator:** Stay informed at a glance with our intuitive physical indicator with LED lights, providing immediate visual feedback for your system's On/Off status.
- **Compact Size:** Experience unparalleled efficiency with our compact design, engineered to fit seamlessly into any setup while maximizing performance.
- **Low Power Consumption:** Efficient electrical draw supports mobile equipment, trailers, and field applications.



ORDERING INFORMATION	
PRODUCT #	DESCRIPTION
DPEV-1SS	1" Full Port Stainless Steel Electric Valve, 12V DC, 0.8 Sec, ON/OFF, Weatherpack 3 Pin Shroud
DPEV-125SS	1¼" Full Port Stainless Steel Electric Valve, 12V DC, 0.8 Sec, ON/OFF, Weatherpack 3 Pin Shroud

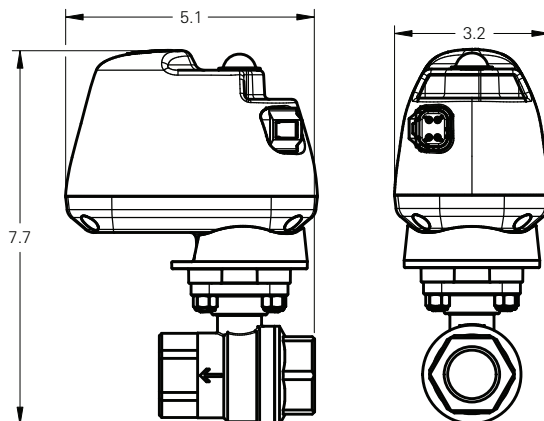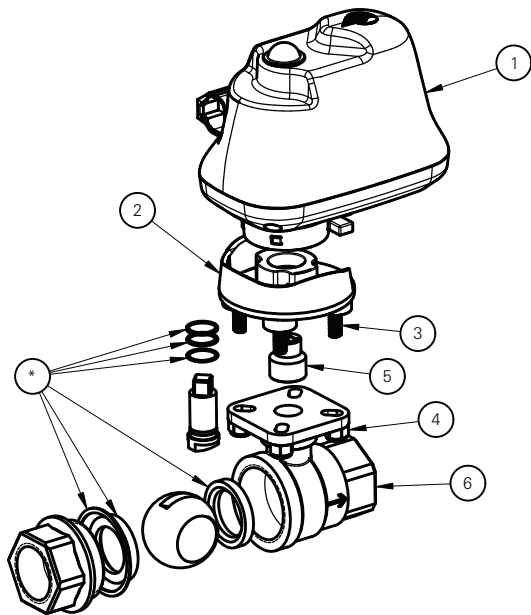

ITEMS DENOTED "*" ARE INCLUDED IN THE SEAL REPAIR KIT

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	DPEV-1A-OPEN	ACTUATOR, EV1, ON/OFF W/ OPEN FEEDBACK
2	1	105-0009	BRACKET, EV1 TO ISO F05
3	4	100-0022	Bolt, 1/4-20 x 7/8 in, Hex Head, SS
4	4	101-0004	NUT, 1/4-20, NYLOC
5	1	208-0004	COUPLER, EV1 TO 1" SS
6	1	200-0001	VALVE, SS, 1" FULL PORT, 2-PIECE
7	1	398-0005	HARNESS ADAPTER, DT4 PLUG X WP 3 PIN SHROUD (NOT SHOWN)

ORDERING INFORMATION	
PRODUCT #	DESCRIPTION
DPEV-1SS-SEALKIT	1" SS Seal Repair Kit
DPEV-125SS-SEALKIT	1 1/4" SS Seal Repair Kit

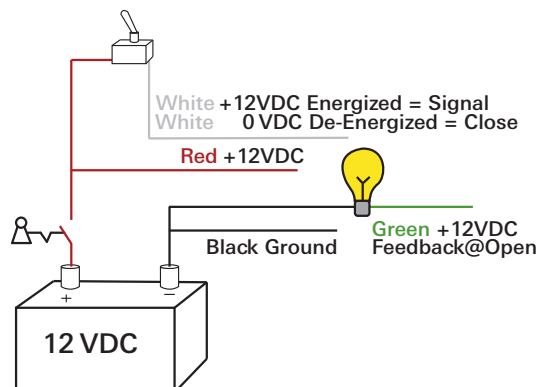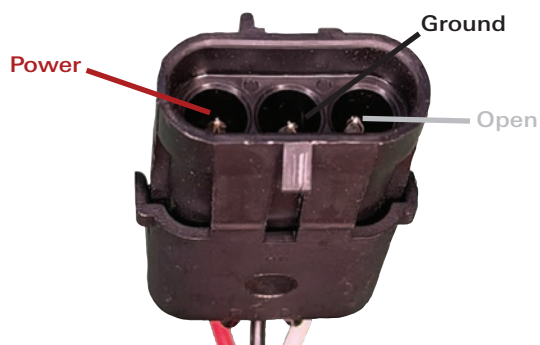

SPECIFICATIONS	
SPECIFICATIONS	
Size	1" or 1 1/4"
Voltage	12 Volt DC
Connection	1" or 1 1/4" Female NPT
Open/Closed Indicator	Yes
On/Off Response Time	0.8 Second
IP68 Waterproof	Yes
Wiring	On/Off 3 Wire
Connector	Weather Pack
Maximum Pressure	600 PSI
Storage Temp	-40° to 185° F (-40° C to 85° C)
Operating Temp	32° to 158° F (35° C to 70° C)
Optional Handle	Yes
Valve Materials	CF8M SS Body, 316 SS Ball and Stem, PTFE seats and body seal, Viton® and PTFE stem seals
Actuator Materials	Glass-filled Nylon, polycarbonate, Viton® & silicone seals
Dimensions	5.3" x 3.2" x 7.7"



DURA PRODUCTS
Technology with Lasting Value
www.DuraProducts.com
Arcadia, IN 46030 | (317) 984-4003

Dura_SS_Valves_072026