

DEF DURA-PUMP™
135 PORTABLE TOTE



ALL-IN-1

COMPLETE SYSTEM to
TRANSPORT, DISPENSE & STORE
DIESEL EXHAUST FLUID

PUMPING SYSTEM CONTAINS	
135-Gallon Tote	Specially designed to maintain the strictest purity of DEF
Pump System	ISO/EPA compliant DEF Easy Caddy pumping system
Coupler	RPV; MicroMatic
Discharge Hose	3/4" x 18ft, 6m
Suction Hose	3/4" x 1.5ft, 0.5m
Lid	6"; Vented
Nozzle	Manual or Automatic
Meter	DEF Dura-Meter™ (optional)
Other	All hose clamps and fittings

/ Includes a 2-year Warranty & Maintenance Program



ORDERING INFORMATION	
MANUAL NOZZLE	
DEFE-6518ME-12-135	12 Volt
DEFE-6518ME-110-135	110 Volt
AUTOMATIC NOZZLE	
DEFE-6518AE-12-135	12 Volt
DEFE-6518AE-110-135	110 Volt
DEF Dura-Meter™ DP-3000D	(sold separately)

Tote, Lid and Container Valve INCLUDED.



5



DURA PRODUCTS
Technology with Lasting Value


PO Box 380
504 Demoss Ave
Arcadia, IN 46030
(317) 984-4003

www.DuraProducts.com



DP_DEF_MINI_102323

PREMIUM HIGH-FLOW
DEF DISPENSING
SYSTEMS
10+GPM

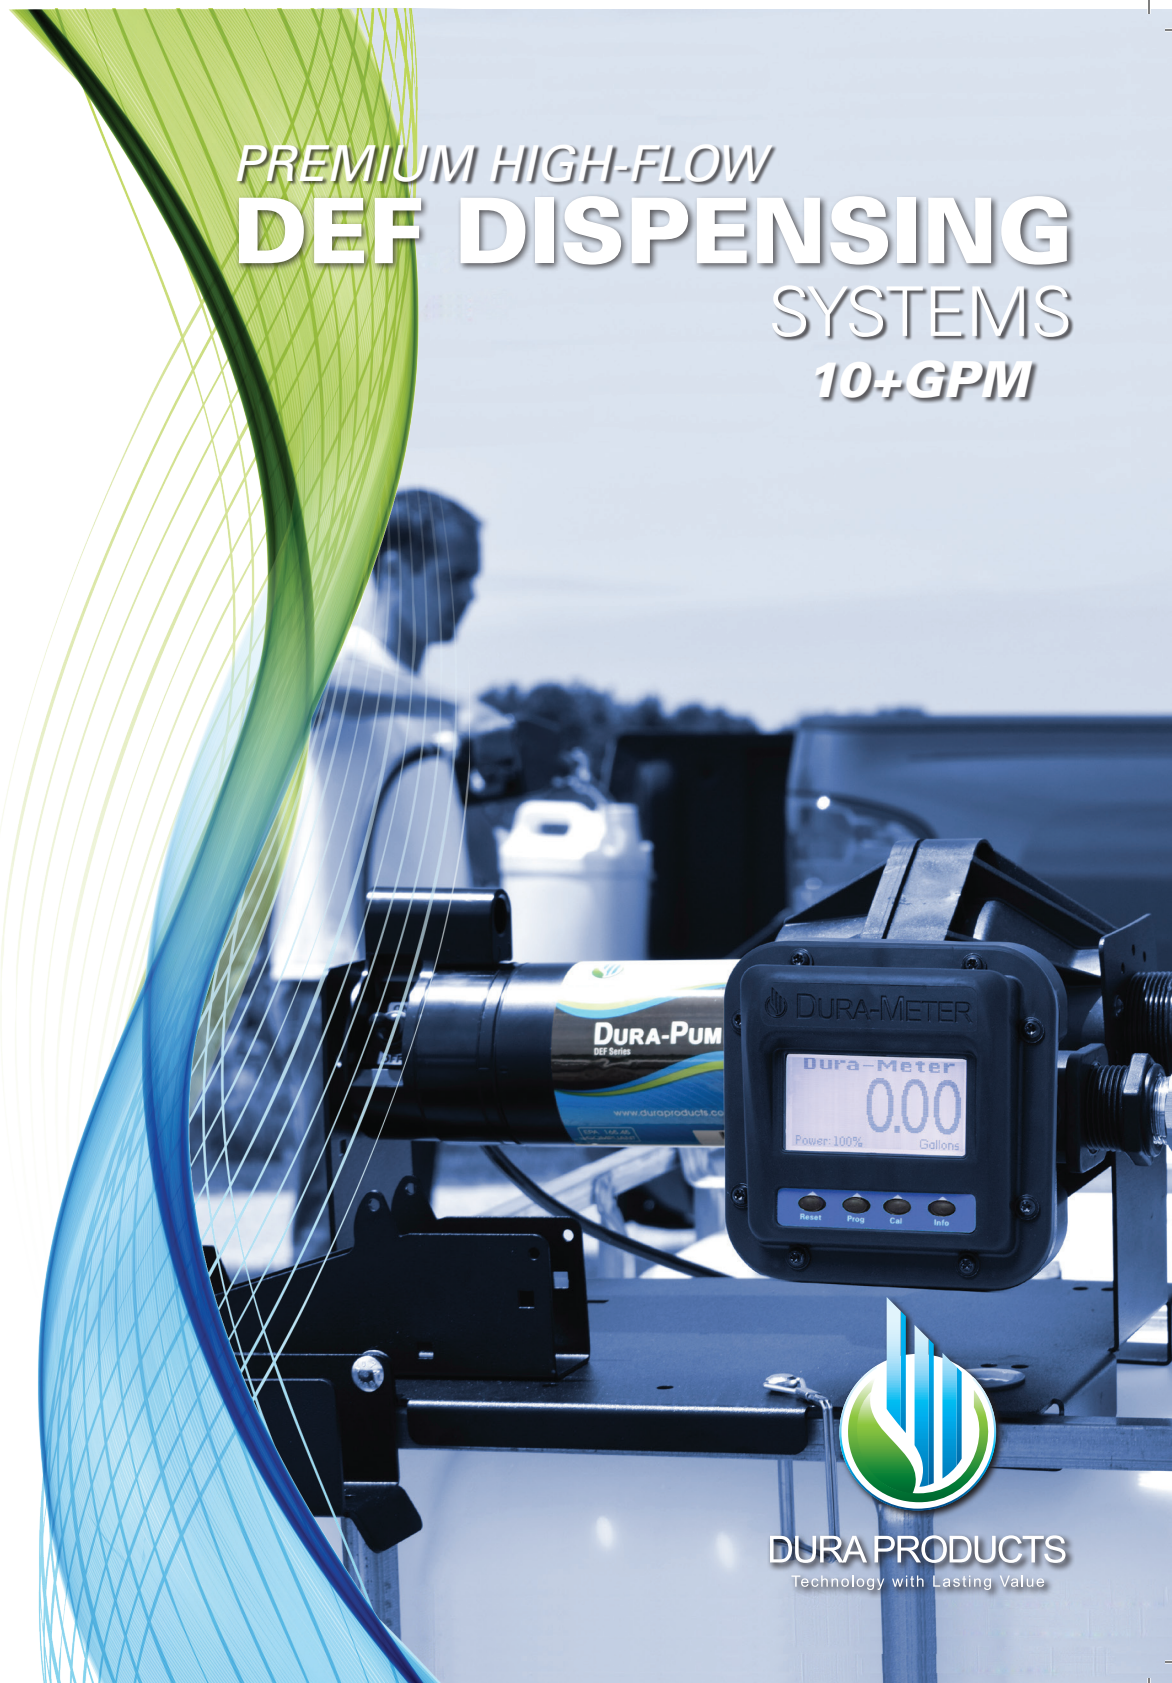

DURA PRODUCTS
Technology with Lasting Value

DEF DURA-PUMP™ TOP UNLOAD



ORDERING INFORMATION

MANUAL NOZZLE

DEFT-6018ME-12 12 Volt

DEFT-6018ME-110 110 Volt

AUTOMATIC NOZZLE

DEFT-6018AE-12 12 Volt

DEFT-6018AE-110 110 Volt

DEF Dura-Meter™ DP-3000D
(sold separately)

*Tote, Lid and Container
Valve INCLUDED.*

/ Includes a 2-year Warranty
& Maintenance Program



PUMPING SYSTEM CONTAINS

10+GPM Pump	High-Flow Dura-Pump™
Downtube	1" Telescoping
Nozzle	Manual or Automatic
Discharge Hose	3/4" x 18ft, 6m
Meter	DEF Dura-Meter™ (optional)
Other	All hose clamps and fittings

*Totes, Drums, Lid and Container
Valves sold separately*

DEF DURA-PUMP™ EASY CADDY TOP SUCTION

For totes with RPV type valve



TOP MOUNT

*Easy Caddy secured
on top of 330 tote
and 135 tote*

PUMPING SYSTEM CONTAINS

10+GPM Pump	High-Flow Dura-Pump™
Coupler	RPV; MicroMatic
Discharge Hose	3/4" x 18ft, 6m
Suction Hose	3/4" x 1.5ft, 0.5m
Nozzle	Manual or Automatic
Meter	DEF Dura-Meter™ (optional)
Other	All hose clamps and fittings




ORDERING INFORMATION

MANUAL NOZZLE	AUTOMATIC NOZZLE
DEFE-6518ME-12 12 Volt	DEFE-6518AE-12 12 Volt
DEFE-6518ME-110 110 Volt	DEFE-6518AE-110 110 Volt

DEF Dura-Meter™ DP-3000D (sold separately)

*Meter, Totes, Drums, Lid and
Container Valves sold separately.*

/ Includes a 2-year Warranty & Maintenance Program



DEF DURA-PUMP™

/ High-Flow pump with up to 15GPM/56LPM free flow rate and 10+GPM/40+LPM with 3/4" discharge hose and nozzle

/ Self-priming diaphragm pump with internal bypass

/ Motor thermally protected from overheating

/ 30 minute duty cycle

/ Suction port has 2" Male NPT and 1" Female NPT

/ Pump is easily field serviceable

/ 10 minute auto-shut off option available (110V only)

/ Includes a 2-year Warranty & Maintenance Program

DEF DURA-METER™

/ Made of impact resistant Lexan™ faceplate

/ 100% moisture-sealed circuitry

/ Same great menu driven backlit display

/ Plumbed for both in-line and 90 degree applications

/ Includes a 2-year Warranty & Maintenance Program

ORDERING INFORMATION

DP-3000D

SPECIFICATIONS

Operating Temp	-10°F to 130°F; -23°C to 54°C
Flow Rate	2 to 22GPM, 4 to 44LPM
ISO22241-3 Compliant	Yes
Meter Accuracy	+ / - .5%
Maximum Pressure	40 PSI
Wetted Materials	Polypropylene; 304 Stainless Steel; Ryton; EPDM seals

ORDERING INFORMATION

DEF-6018E-12 12 Volt DEF-6018E-110 110 Volt

SPECIFICATIONS

Check Valve	Internal; EPA 165.45 compliant
Vertical Suction Lift	Self-priming to 10ft, 3m
Power Cord	12 Volt: 20ft, 6m; 110 Volt: 6.5ft, 2m
Motor	1/4 HP, 186W
Amps	12 Volt: 18.5; 110 Volt: 2.0
Suction Port	2" Male and 1" Female NPT thread
Discharge Port	1" Female NPT thread
ISO22241-3 Compliant	Yes
Wetted Materials	Polypropylene; Santoprene; 304 Stainless Steel; EPDM seals