



DURA PRODUCTS

Technology with Lasting Value

MINI CATALOG

Market Leader
in agricultural transfer systems

2" High-Flow
Dura-Meter™



DURA PRODUCTS

INTRODUCING OUR NEW

2" AND 3"
HIGH-FLOW
DURA-METER™

- / Intuitive menu-driven backlit display
- / Impact resistant Lexan™ faceplate
- / 100% Moisture-sealed circuitry
- / Multiple plumbing options
- / Includes a 2-year Warranty & Maintenance Program

3" High-Flow
Dura-Meter™



SPECIFICATIONS

Nominal Size	2"	3"
Connection	M220 Flange	M300 Flange
Model	Dura HFM 2	Dura HFM 3
Batteries	(2) 9 Volt	(2) 9 Volt
Accuracy	+ / - 0.5%	+ / - 0.5%
Backlit Display	Yes	Yes
GPM	15 - 300	15 - 700
Maximum Pressure	150 PSI	150 PSI
Wetted Materials	GF Polypropylene, Viton®, EPDM or Silicone seal, Sapphire	GF Polypropylene, Viton®, EPDM or Silicone seal, Sapphire

ORDERING INFORMATION


2"	DP-HFM2V Viton®	DP-HFM2E EPDM	DP-HFM2S Silicone
3"	DP-HFM3V Viton®	DP-HFM3E EPDM	DP-HFM3S Silicone

Must specify Viton® (**product # and V**),
EPDM (**product # and E**), or
Silicone (**product # and S**) when ordering.

2" HIGH-FLOW AND 3" HIGH-FLOW COMPARISON

Specifications	2"	3"
Nominal Size	2"	3"
Model	DP-HFM2	DP-HFM3
Connection	M220 flange	M300 flange
Meter Accuracy	+/- 0.5%	+/- 0.5%
Non-conductive Fluids	Yes	Yes
Fluid Flow Initiates Measurement	Yes	Yes
Battery Size/Voltage	(2) 9 Volt	(2) 9 Volt
Battery Life Indicator	Yes	Yes
Backlit Display	Yes	Yes
Maximum Pressure	150 PSI	150 PSI
Minimum GPM	15	15
Maximum GPM	300	700
Minimum Temp	+ 32 °F	+ 32 °F
Maximum Temp	+ 140 °F	+ 140 °F
Meter Type/Style	Paddlewheel	Paddlewheel
Body Construction Material	GF Polypropylene	GF Polypropylene
Paddle Bearing Construction Material	Sapphire	Sapphire
Electrodes Construction Material	No	No
Straight Inlet *	7" *	7" *
Straight Outlet *	7" *	7" *
Field Calibration Capability *	Yes *	Yes *

* Straight Inlet / Outlet Requirements are significantly reduced with Meter Calibration to achieve +/- 0.5% Accuracy

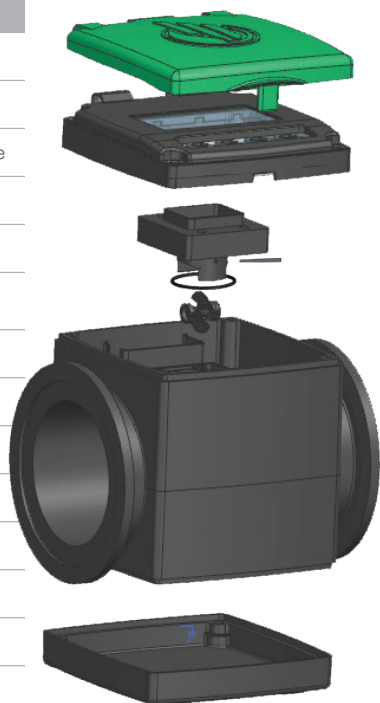

Moisture sealed circuitry.



Special Features

- / Easily serviced
- / Extended battery life with use of (2) 9V batteries
- / Fluid flow initiates measurement
- / Versatile plumbing configurations
- / Displays batch and total volume
- / Gallons / Liters flow rate measurement

DURA-ABS™ AUTO-BATCH SYSTEM

"The system **reduces** human error and creates valuable **efficiency** for us."

-Peterson Farms, KY



How It Works

- 1 Select the volume desired
- 2 Press START
- 3 The pump will begin to dispense fluid then automatically shut off upon completion

- / Intuitive interface allows for the selection of manual or automatic operation with the flip of a switch
- / High-flow pump with up to 15GPM/56LPM flow rate
- / Optimized for repeatable batching; returns to the last volume amount dispensed
- / 100% moisture-sealed circuitry
- / Includes Dura-Meter™ with impact resistant Lexan™ faceplate
- / Available in 12 Volt or 110 Volt, and Viton®, EPDM, or Silicone options
- / Measures in gallons, liters and ounces
- / Includes a 2-year Warranty & Maintenance Program



"I've got six plumbed to an inductor. It **works** great, and **saves** me time when mixing batches."

-Don, Nutrien Ag Solutions

ORDERING INFORMATION

DPABS-4312 12 Volt

DPABS-4315 110 Volt


Must specify Viton® (**product # and V**),
EPDM (**product # and E**), or
Silicone (**product # and S**) when ordering.


Always turn pump off and disconnect
system from power when not in use.

DURA-ABS™ Automated Direct Injection

AUTO-BATCH SYSTEM DIRECT INJECTION



The **Dura Auto-Batch System ** (*Automated Direct Injection*) works by direct injecting herbicides into the carrier flow while filling the sprayer.

**Increase
PROFITABILITY**
with a Dura-ABS™ 
Direct Injection



How It Works

- 1 Select the volume desired
- 2 Press START
- 3 The pump will begin to inject fluid then automatically shut off upon completion

- / Lowest cost automated sprayer filling system
- / Filling your sprayer has never been easier or faster
- / Reduces operator error and herbicide exposure
- / Provides recirculation, maximizing chemical performance
- / Accurately dispenses repeatable batches
- / Eliminates cross contamination

Video available at
www.DuraProducts.com/videos

ORDERING INFORMATION

PRODUCT #	QTY	DESCRIPTION
DPABS-4312V**	1-4	DURA-ABS™ Auto-Batch System
Dura-ABS DI 2" Kit OR Dura-ABS DI 3" Kit	1-4 1 PER DURA-ABS™	2" Accessory Kit OR 3" Accessory Kit
Dura-ABS DI 2" Gauge Kit OR Dura-ABS DI 3" Gauge Kit	1	2" Gauge Kit OR 3" Gauge Kit
DP-P4040 DI	1	DI Frame

** Available in 12V or 110V with Viton®, EPDM, or Silicone Seals

*Always turn pump off and disconnect system from power when not in use.
Never leave unattended while in use.*

What a **Real User** is saying about the **DURA-ABS™ DI Direct Injection...**



Reduced our sprayer load time by more than 78%.

-Woodward Farms

AUTOMATED DIRECT INJECTION FILL USING DURA-ABS™ DI

Austin Woodward / Woodward Farms

Hagie STS12, 1200 Gallon Capacity, 3" Plumbing

PRODUCTS DIRECT INJECTED			PRODUCTS INJECTED
Atrazine 4L	27.5 gal per fill	1 qtA	<i>Callisto (added from 1 gal jug)</i>
Durango DMA	20.5 gal per fill	1.5 ptA	<i>Zidua SC (added from 1 gal jug)</i>
Class Act NG	20.5 gal per fill	1.5 ptA	<i>Interlock (added from 2.5 gal jug)</i>

68.5 GALLONS OF PRODUCT INJECTED INTO CARRIER STREAM WITH DI

DURA-ABS™ DI Injection Time 3 minutes 45 seconds

Sprayer Fill Time 6 minutes 15 seconds

Woodward Farms video available at
www.DuraProducts.com/videos

"When it comes to spraying we want to be safe and quick.
 With the Dura-ABS Automated Direct Injection,
 we not only have less exposure to chemicals, but
 we've reduced our sprayer load time by more than 78%."

- Austin Woodward, Woodward Farms

The **DURA-ABS™ DI Direct Injection** gives you a high return on your investment.



Calculate your own Additional Spraying Capacity with the
DURA-ABS™ DI Direct Injection

Additional Spraying Capacity per Day		Woodward Farms Savings	Your Savings
System Sprayer Fill Time (mins)		20 min	
DURA-ABS DI Sprayer Fill Time (mins)	-	6.25 min	6.25
Mins Saved per Fill	=	13.75 min	
Fills per Day	x	5	
Mins Saved per Day	=	68.75 mins	
Acres Sprayed per Hour		100.00 ac	
Additional Capacity per Day*		115.00 ac	
Chemical Application Rate / Acre**	x	6.69	
Spraying Days	x	9.00	
Savings After 9 Spraying Days	=	\$ 6,924.15	\$

*minutes saved per day / 60 x acres sprayed per hour

**2017 Indiana Farm Custom Rates (Purdue University)

Video available at
www.DuraProducts.com/videos



DURA PRODUCTS
Technology with Lasting Value



DURA-ABV™ -B

**AUTOMATION
MADE EASY**

BANJO EVX® 100B*

AUTO-BATCH METER

ELECTRIC VALVE



***Available in NPT or Manifold**

SIMPLE

SMART

ECONOMICAL

- / Join factory installed electric connectors
- / Plumb valve to Auto-Batch
- / Select volume desired
- / Press START
- / Banjo EVX® Valve will open, fluid is measured and valve automatically closes upon completion

- / Eliminates operator error and herbicide exposure
- / Real-time valve LED performance feedback
- / Inventory management
- / Female NPT and manifold flange connections offer plumbing options
- / Ability to save up to five calibrations and measure in gallons, liters and ounces

- / Consists of a Dura-ABV™ and Banjo EVX® Valve
- / No sophisticated wiring, PLC or plumbing
- / Multiple units can be used in manifold application
- / Ideally suited with venturi driven chemical handling system



DURA-ABV™ AND BANJO EVX®



How It Works

- 1 Select the volume desired
- 2 Press START
- 3 Banjo EVX® Valve will open, fluid is measured and valve automatically closes upon completion

Video available at
www.DuraProducts.com/videos

DURA-ABV™-B TECHNICAL SPECIFICATIONS

Operating Temp	-10° F to 130° F, -23° C to 54° C
Flow Rate	2 to 22GPM, 7.5 to 83LPM
Meter Accuracy	+/- .5%
Backlit LCD Display	Yes; with back-light timeout
Max Pressure	40 PSI
Power Source	4 "AAA" batteries; strength indicator
Wetted Materials	Polypropylene; 304 Stainless Steel; Ryton®; Viton® seals
Housing Chamber	Polypropylene
Moisture Sealed	Yes; with sealed circuitry
Batch Count	Yes
Total Count	Yes
Units Measured	Gallons, Liters and Ounces
Chemically Resistant	Yes
Calibration	Preset, Quick List or Manual
Saved Calibrations	5
Dimensions	5-1/4" W x 7-1/4" H x 4-1/4" D
Weight	1.5 lbs



ORDERING INFORMATION

PRODUCT

DURA-ABV-B

DESCRIPTION

Dura-ABV™ Auto-Batch Meter
with Banjo Connector

*Always turn pump off and disconnect system
from power when not in use.*

Never leave unattended while in use.



DURA-METER™

- / Made of impact resistant Lexan™ faceplate
- / 100% moisture-sealed circuitry
- / Menu driven backlit display
- / Plumbed both for in-line and 90-degree applications
- / Includes a 2-year Warranty & Maintenance Program



SPECIFICATIONS	
Operating Temp	-10°F to 130°F, -23°C to 54°C
Flow Rate	2 to 22GPM, 7.5 to 83LPM
Meter Accuracy	+ / - .5%
Backlit Display	Yes
Maximum Pressure	40 PSI
Wetted Materials	Polypropylene; 304 Stainless Steel; Ryton; Viton®, EPDM, or Silicone seals

Special Features

- / Extended battery life with use of 4 "AAA" batteries
- / Faceplate over-molded with Santoprene and filled with gel for improved shock resistance

Customer should always check calibration before use.

ORDERING INFORMATION

DP-3000V Viton®

DP-3000E EPDM

DP-3000S Silicone



DURA-PUMP™

- / High-Flow with up to 15GPM/56LPM flow rate
- / Self-priming diaphragm pump with internal by-pass
- / Motor thermally protected from overheating
- / 30-minute duty cycle
- / Suction port has 2" Male NPT and 1" Female NPT
- / Pump is easily field serviceable
- / Includes a 2-year Warranty & Maintenance Program

SPECIFICATIONS

Check Valve	Internal; EPA 165.45 compliant
Vertical Suction Lift	Self-priming to 10ft, 3m
Power Cord	12 Volt: 20ft, 6m; 110 Volt: 6.5ft, 2m
Motor	1/4 HP, 186W
Amps	12 Volt: 18.5; 110 Volt: 2.0
Suction Port	2" Male and 1" Female NPT thread
Discharge Port	1" Female NPT thread
Wetted Materials	Polypropylene; Santoprene; Viton®, EPDM, or Silicone seals; 304 Stainless Steel


ORDERING INFORMATION

DP-4012 12 Volt **DP-4015** 110 Volt

(Available in Viton®, EPDM, or Silicone)

Must specify Viton® (**product # and V**),
EPDM (**product # and E**), or
Silicone (**product # and S**) when ordering.

Always turn pump off and disconnect
system from power when not in use.

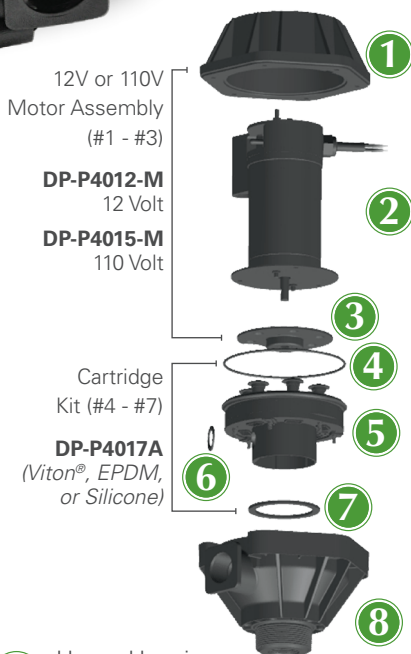

- Upper Housing
DP-P4002A
- 12V or 110V Motor
DP-P4012-M 12 Volt
DP-P4015-M 110 Volt
- Drive Plate **DP-P4013A**
- O-ring
DP-P4004AO (Viton®, EPDM, or Silicone)
- Cartridge
DP-P4017A (Viton®, EPDM, or Silicone)
- Bypass Gasket
DP-G4008AG (Viton®, EPDM, or Silicone)
- Bottom Gasket
DP-P4001AG (Viton®, EPDM, or Silicone)
- Bottom Housing
DP-H4001A (Viton®, EPDM, or Silicone)

DURA-PUMP™ EASY CADDY



TOP MOUNT
Easy Caddy secured
on top of tote

SIDE MOUNT
Easy Caddy secured
on side of tote



GROUND
Easy Caddy used
from the ground



DRUM
Easily converted
to a 30/55-Gallon
Drum



MONSANTO TANK
Easily converted to a MTS



SNYDER TANK
Easily converted
to a GEM Cap

- / The Easy Caddy can be mounted in six different configurations on a variety of tank/tote and drum types
- / Use it mounted on top of a tank or on top of a 30/55-Gallon Drum, on the side of tank, or off the ground depending on user preference
- / Conversion kits are available to mount a system on Monsanto or Snyder type tanks
- / Includes a 2-year Warranty & Maintenance Program

ORDERING INFORMATION	
WITH METER	WITHOUT METER
DPEM-4312 12 Volt	DPE-4012 12 Volt
DPEM-4315 110 Volt	DPE-4015 110 Volt

Must specify Viton® (product # and V), EPDM (product # and E), or Silicone (product # and S) when ordering.

Always turn pump off and disconnect from power when not in use.


Tanks, Totes and Drums sold separately.



PUMPING SYSTEM CONTAINS	
Pump	High-Flow Dura-Pump™
Suction Hose	1" x 5ft, 1.5m
Discharge Hose	1" x 12ft, 3.6m
Nozzle	Ball valve
Camlock	2"
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples

DURA-PUMP™ EASY CADDY CONVERSION KITS

For Use On **MONSANTO TANK** MTS Easy Caddy Conversion Kit **DP-AK0008**



Begin with the
Dura Easy Caddy



Remove Dura-Pump™
from Easy Caddy frame




Add MTS Kit
DP-AK0008



Dura MTS Kit
DP-AK0008 installed
on Monsanto tank

For Use On **SNYDER TANK** GEM Cap Easy Caddy Conversion Kit **DP-AK0009**



Begin with the
Dura Easy Caddy



Remove Dura-Pump™
from Easy Caddy frame



Add GEM Cap Kit
DP-AK0009



Dura GEM Cap Kit
DP-AK0009 installed
on Snyder tank

For Recirculation On **IBC/TOTE** Recirculation Kit **DP-AK0007**



Begin with the
Dura Easy Caddy




Add Recirculation Kit
DP-AK0007



Dura Recirculation Kit
DP-AK0007 installed
on IBC/TOTE

For Use On **30/55-GALLON DRUM** 1" NPT Telescoping Downtube **DP-T4001**



Begin with the
Dura Easy Caddy



Remove Dura-Pump™
from Easy Caddy frame



Add DP-T4001
1" NPT Telescoping
Downtube



DP-T4001
1" NPT Telescoping
Downtube installed on
30/55-Gallon Drum

DURA-PUMP™ SPECIALTY SYSTEMS

Tanks, Totes and Drums sold separately. Always turn pump off and disconnect from power when not in use.



DURA-PUMP™ QUICK CADDY

- / Our premium highly portable system with built-in carry handle and rugged frame
- / For use in multiple mounting applications both on top of tote and ground adaptable
- / Includes a 2-year Warranty & Maintenance Program

ORDERING INFORMATION	
WITH METER	WITHOUT METER
DPQM-4312 12 Volt	DPQ-4012 12 Volt
DPQM-4315 110 Volt	DPQ-4015 110 Volt

Must specify Viton® (product # and V) or EPDM (product # and E) when ordering.



PUMPING SYSTEM CONTAINS	
Pump	High-Flow Dura-Pump™
Suction Hose	1" x 5ft, 1.5m
Discharge Hose	1" x 12ft, 3.6m
Nozzle	Ball valve
Camlock	2"
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples



DURA-PUMP™ TOP UNLOAD

- / Top mount application with 2" NPT bung, 1" telescoping downtube to accommodate varying tank heights
- / Includes a 2-year Warranty & Maintenance Program

ORDERING INFORMATION	
WITH METER	WITHOUT METER
DPTM-4312 12 Volt	DPT-4012 12 Volt
DPTM-4315 110 Volt	DPT-4015 110 Volt

Must specify Viton® (product # and V) or EPDM (product # and E) when ordering.



PUMPING SYSTEM CONTAINS	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m
Downtube	1" Telescoping
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples



DURA-PUMP™ BOTTOM UNLOAD

- / Configured to mount at bottom of tank/tote
- / Includes a 2-year Warranty & Maintenance Program

ORDERING INFORMATION	
WITH METER	WITHOUT METER
DPBM-4312 12 Volt	DPB-4012 12 Volt
DPBM-4315 110 Volt	DPB-4015 110 Volt

Must specify Viton® (product # and V) or EPDM (product # and E) when ordering.



PUMPING SYSTEM CONTAINS	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m
Camlock	2"; direct attach to tote
Motor Bracket	Yes, rear
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples

DURA-PUMP™ SPECIALTY SYSTEMS

Tanks, Totes and Drums sold separately. Always turn pump off and disconnect from power when not in use.

MONSANTO TANK



For use with
Monsanto tanks



ORDERING INFORMATION	
WITH METER	WITHOUT METER
DPMTSM-4312 12 Volt	DPMTS-4012 12 Volt
DPMTSM-4315 110 Volt	DPMTS-4015 110 Volt

Must specify Viton® (product # and V) or EPDM (product # and E) when ordering.

PUMPING SYSTEM CONTAINS	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m
Camlock	MTS; direct attach to tote
Motor Bracket	Yes, rear
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples

/ Includes a 2-year Warranty & Maintenance Program

SNYDER / GEM CAP TANK



For use with
Snyder tanks
with large 8" lid



ORDERING INFORMATION	
WITH METER	WITHOUT METER
DPGEMM-4312 12 Volt	DPGEM-4012 12 Volt
DPGEMM-4315 110 Volt	DPGEM-4015 110 Volt

Must specify Viton® (product # and V) or EPDM (product # and E) when ordering.

PUMPING SYSTEM CONTAINS	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m
GEM Cap Lid	Spin collar; all plumbing assembled on pump
Motor Bracket	Yes; rear
Downtube	1" Telescoping
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs and nipples

/ Includes a 2-year Warranty & Maintenance Program



ORDERING INFORMATION	
WITH METER	WITHOUT METER
DPEM-4612NV 12 Volt	DPE-4612NV 12 Volt
DPEM-4615NV 110 Volt	DPE-4615NV 110 Volt

Easy Caddy pumping system in Viton®

N-SERVE EASY CADDY

PUMPING SYSTEM CONTAINS	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m; Premium XLPE
Suction Hose	1" x 5ft, 1.5m; Premium XLPE
Dry-Poppet Coupler	Available; sold separately (see right)
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs & nipples



Female
Coupling
Dry Poppet
DP-C4010N
sold separately

/ Includes a 2-year Warranty & Maintenance Program



ORDERING INFORMATION	
WITH METER	WITHOUT METER
DPBM-4312NV 12 Volt	DPB-4012NV 12 Volt
DPBM-4315NV 110 Volt	DPB-4015NV 110 Volt

Bottom Unload pumping system in Viton®

N-SERVE BOTTOM UNLOAD

PUMPING SYSTEM CONTAINS	
Pump	High-Flow Dura-Pump™
Discharge Hose	1" x 12ft, 3.6m; Premium XLPE
Motor Bracket	Yes; rear
Dry-Poppet Coupler	Available; sold separately (see right)
Nozzle	Ball valve
Meter	Dura-Meter™ (optional)
Other	All hose clamps, barbs & nipples



Female
Coupling
Dry Poppet
DP-C4010N
sold separately

/ Includes a 2-year Warranty & Maintenance Program



DEF DURA-METER™

- / Made of impact resistant Lexan™ faceplate
- / 100% moisture-sealed circuitry
- / Same great menu driven backlit display
- / Plumbed for both in-line and 90 degree applications
- / Includes a 2-year Warranty & Maintenance Program



ORDERING INFORMATION

DP-3000D

SPECIFICATIONS	
Operating Temp	-10°F to 130°F, -23°C to 54°C
Flow Rate	2 to 22GPM, 4 to 44LPM
ISO22241-3 Compliant	Yes
Meter Accuracy	+ / - .5%
Maximum Pressure	40 PSI
Wetted Materials	Polypropylene; 304 Stainless Steel; Ryton; EPDM seals



DEF DURA-PUMP™

- / High-Flow pump with up to 15GPM/56LPM free flow rate and 10+GPM/40+LPM with ¾" discharge hose and nozzle
- / Self-priming diaphragm pump with internal bypass
- / Motor thermally protected from overheating
- / 30-minute duty cycle
- / Suction port has 2" Male NPT and 1" Female NPT
- / Pump is easily field serviceable
- / 10-minute auto-shut off motor (available in 110V only)
- / Includes a 2-year Warranty & Maintenance Program

ORDERING INFORMATION

DEF-2012E 12 Volt

DEF-2015E 110 Volt


SPECIFICATIONS	
Check Valve	Internal; EPA 165.45 compliant
Vertical Suction Lift	Self-priming to 10ft, 3m
Power Cord	12 Volt: 20ft, 6m; 110 Volt: 6.5ft, 2m
Motor	1/4 HP, 186W
Amps	12 Volt: 18.5; 110 Volt: 2.0
Suction Port	2" Male and 1" Female NPT thread
Discharge Port	1" Female NPT thread
ISO22241-3 Compliant	Yes
Wetted Materials	Polypropylene; Santoprene; 304 Stainless Steel; EPDM seals

DEF DURA-PUMP™ EASY CADDY TOP SUCTION

For totes with RPV type valve

PUMPING SYSTEM CONTAINS	
10+GPM Pump	High-Flow Dura-Pump™
Coupler	RPV; MicroMatic
Discharge Hose	3/4" x 20ft, 6m
Suction Hose	3/4" x 1.5ft, 0.5m
Nozzle	Manual or Automatic
Meter	DEF Dura-Meter™ (optional)
Other	All hose clamps & fittings

/ Includes a 2-year Warranty & Maintenance Program

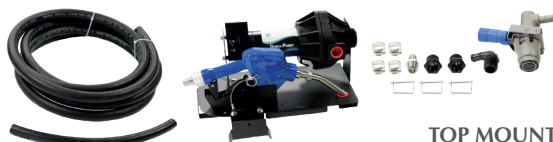

TOP MOUNT

Easy Caddy secured on top of a 330 tote



Meter, Totes, Drums, Lid and Container Valves sold separately.

ORDERING INFORMATION MANUAL NOZZLE

DEFE-2512ME 12 Volt

DEFE-2515ME 110 Volt

AUTOMATIC NOZZLE

DEFE-2512AE 12 Volt

DEFE-2515AE 110 Volt

DEF Dura-Meter™
DP-3000D (sold separately)

DEF DURA-PUMP™ TOP UNLOAD

PUMPING SYSTEM CONTAINS	
10+GPM Pump	High-Flow Dura-Pump™
Downtube	1" Telescoping
Nozzle	Manual or Automatic
Discharge Hose	3/4" x 20ft, 6m
Meter	DEF Dura-Meter™ (optional)
Other	All hose clamps & fittings

/ Includes a 2-year Warranty & Maintenance Program

ORDERING INFORMATION MANUAL NOZZLE

DEFT-2012ME 12 Volt

DEFT-2015ME 110 Volt

AUTOMATIC NOZZLE

DEFT-2012AE 12 Volt

DEFT-2015AE 110 Volt

DEF Dura-Meter™
DP-3000D (sold separately)

Meter, Totes, Drums and Lid sold separately.



DEF DURA-PUMP™ 135 PORTABLE TOTE COMPLETE SYSTEM to TRANSPORT, DISPENSE & STORE DIESEL EXHAUST FLUID

PUMPING SYSTEM CONTAINS	
135-Gallon Tote	Specially designed to maintain the strictest purity of DEF
Pump System	ISO/EPA compliant DEF Easy Caddy pumping system
Coupler	RPV; MicroMatic
Discharge Hose	3/4" x 20ft, 6m
Suction Hose	3/4" x 1.5ft, 0.5m
Lid	6"; Vented
Nozzle	Manual or Automatic
Meter	DEF Dura-Meter™ (optional)
Other	All hose clamps & fittings

/ Includes a 2-year Warranty & Maintenance Program



ORDERING INFORMATION MANUAL NOZZLE

DEFE-2512ME-135 12 Volt

DEFE-2515ME-135 110 Volt

AUTOMATIC NOZZLE

DEFE-2512AE-135 12 Volt

DEFE-2515AE-135 110 Volt

DEF Dura-Meter™
DP-3000D (sold separately)

ALL- IN-1



Tote, Lid and Container Valve INCLUDED.

DURA-AB™

AUTO-BATCH METER

NOW SOLD SEPARATELY

Upgrade your DURA-PUMP™ to an AUTO-BATCH SYSTEM

ORDERING INFORMATION	
PRODUCT #	DESCRIPTION
DPAB-12 12 Volt	Dura-Meter™ with Auto-Batch
DPAB-15 110 Volt	Dura-Meter™ with Auto-Batch

Must specify Viton® (**product # and V**),
EPDM (**product # and E**), or
Silicone (**product # and S**) when ordering.

Always turn pump off and disconnect
system from power when not in use.

Never leave unattended while in use.

AG ACCESSORIES, PARTS, REPAIR KITS & TANKS



AG Dura-Pump™
Gasket Kit
DP-G4001A-V Viton®
DP-G4001A-E EPDM
DP-G4001A-S Silicone



AG Dura-Pump™ Bottom Housing Kit
with Bottom Gasket and Screws
DP-H4001A-V Viton®
DP-H4001A-E EPDM
DP-H4001A-S Silicone



AG Dura-Pump™ Cartridge KIT
with O-Ring and Bottom Gasket
DP-P4017A-V Viton®
DP-P4017A-E EPDM
DP-P4017A-S Silicone



AG Dura-Meter™ Body
DP-PMB3000V Viton®
DP-PMB3000E EPDM
DP-PMB3000S Silicone



AG Dura-Meter™
Chemical Face Plate
DP-MFP01



RSV / 3 Key
Dispense Coupler,
Viton Seals
DP-R4003



5-Gallon Calibration Jug
DP-J4001



2" Camlock
DP-NF20CL



MTS Camlock
DP-M4001



135-Gallon Tank
DP-AG135

DURA PRODUCTS AG CHEMICAL CHART

COMPOUND	EPDM	Viton®	Silicone
2,4-D Ester		●	
Accord® / Accord® XRT II	●	●	●
Acuron®	●		
Ammonium Sulfate	●	●	●
Atrazine	●	●	
Balance® Flexx	●	●	
Boundary®		●	
Callisto® 480SC	●		
Capreno®	●	●	
Corvus®	●	●	
Degree Xtra®	●	●	
Dicamba / Xtendimax®	●		
DiFlexx® Duo	●	●	
Duramax® / Durango®	●	●	●
Engenia®	●		
Enlist Duo®	●	●	●
EverGol®	●	●	
Foliars		●	
ForeFront®	●		
FulTime® NXT		●	
Fungicides		●	
Garlon® 3A	●		●
Gaucha® 600	●	●	
Gramoxone® / Paraquat		●	
Grazon® P+D / GrazonNext	●		
Halex® GT	●		
Huskie®		●	
Instinct®			●

COMPOUND	EPDM	Viton®	Silicone
Intimidator®	●		●
Keystone® / Keystone® LA			●
Laudis®	●	●	
Lexar® EZ / Lumax® EZ	●		
Liberty®	●		
Lorsban® 4E / Lorsban® Advanced		●	
Matador®	●		●
Max-In® Ultra ZMB	●	●	
MSO / Crop Oil / Oil Based		●	
Nitrogen Based		●	
N-Serve® 24		●	
Parity™		●	
Prosaro®	●	●	
Prowl® / Pendimethalin		●	
Raxil® PRO	●	●	
Rely® 280	●	●	
Resicore®			●
Roundup®	●	●	
Shredder™ E-99		●	
Stratego® / Stratego® YLD	●		
Stylet-Oil		●	
SureStart® / SureStart® II			●
Surpass® EC	●		●
Tacoma®		●	
TopNotch®	●		
Tordon® 22k	●		
Warrant®		●	
Wolverine® Advanced		●	

The Dura Products Chemical Compatibility Chart ***should be considered as a guide only*** due to the many variables which may affect the compatibility of materials. This guide is based on the most recent information obtained from a variety of suppliers and chemical producers and is believed to be accurate. Actual decisions on materials used need to be tested and evaluated by the customer for each specific application. The responsibility of proper chemical compatibility of equipment and material used is the full responsibility of the customer. Dura Products does not warrant product damaged by non compatibility.

For help with the proper selection of a pump for your application needs, please call **(317) 984-4003**.



DURA PRODUCTS

Technology with Lasting Value

PO Box 380

504 Demoss Ave

Arcadia, IN 46030

(317) 984-4003

www.DuraProducts.com

