


DURA PRODUCTS

2" AND 3" HIGH-FLOW DURA-METER™

- Intuitive menu-driven backlit display
- Impact resistant Lexan™ faceplate
- 100% Moisture-sealed circuitry
- Multiple plumbing options
- Includes a 2-year Warranty & Maintenance Program

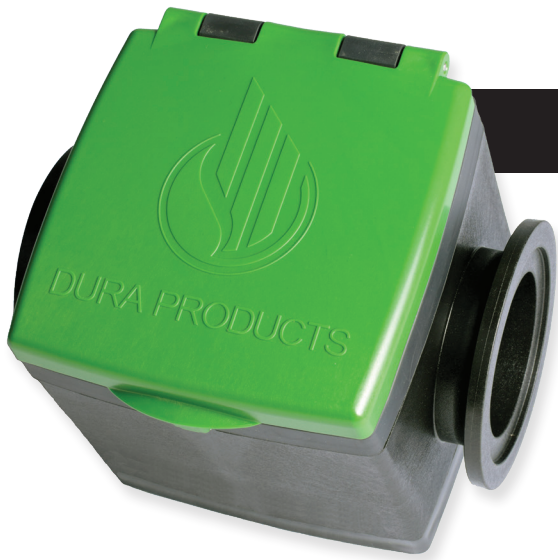

Moisture sealed circuitry.



2" High-Flow Dura-Meter™

Special Features

- Easily serviced
- Extended battery life with use of (2) 9V batteries
- Fluid flow initiates measurement
- Versatile plumbing configurations
- Displays batch and total volume
- Gallons / Liters flow rate measurement

SPECIFICATIONS

| | 2" | 3" |
|-------------------------|---|---|
| Nominal Size | 2" | 3" |
| Connection | M220 Flange | M300 Flange |
| Model | Dura HFM 2 | Dura HFM 3 |
| Batteries | (2) 9 Volt | (2) 9 Volt |
| Accuracy | + / - 0.5% | + / - 0.5% |
| Backlit Display | Yes | Yes |
| GPM | 40 - 300 | 80 - 700 |
| Maximum Pressure | 150 PSI | 150 PSI |
| Wetted Materials | GF Polypropylene, Viton®, EPDM or Silicone seal, Sapphire | GF Polypropylene, Viton®, EPDM or Silicone seal, Sapphire |

ORDERING INFORMATION

| | | | |
|-----------|---------------------------|-------------------------|-----------------------------|
| 2" | DP-HFM2V Viton® | DP-HFM2E EPDM | DP-HFM2S Silicone |
| 3" | DP-HFM3V Viton® | DP-HFM3E EPDM | DP-HFM3S Silicone |

2" AND 3" HIGH-FLOW DURA-METER™



2" High-Flow Dura-Meter™



3" High-Flow Dura-Meter™

2" HIGH-FLOW AND 3" HIGH-FLOW COMPARISON

| Specifications | 2" | 3" |
|--------------------------------------|------------------|------------------|
| Nominal Size | 2" | 3" |
| Model | DP-HFM2 | DP-HFM3 |
| Connection | M220 flange | M300 flange |
| Meter Accuracy | +/- 0.5% * | +/- 0.5% * |
| Non-conductive Fluids | Yes | Yes |
| Fluid Flow Initiates Measurement | Yes | Yes |
| Battery Size/Voltage | (2) 9 Volt | (2) 9 Volt |
| Battery Life Indicator | Yes | Yes |
| Backlit Display | Yes | Yes |
| Maximum Pressure | 150 PSI | 150 PSI |
| Minimum GPM | 40 | 80 |
| Maximum GPM | 300 | 700 |
| Minimum Temp | + 32 °F | + 32 °F |
| Maximum Temp | + 140 °F | + 140 °F |
| Meter Type/Style | Paddlewheel | Paddlewheel |
| Body Construction Material | GF Polypropylene | GF Polypropylene |
| Paddle Bearing Construction Material | Sapphire | Sapphire |

* With manual calibration



DURA PRODUCTS
 Technology with Lasting Value
www.DuraProducts.com
 Arcadia, IN 46030 | (317) 984-4003