

DURA PRODUCTS

INTRODUCING OUR NEW 2" AND 3" DURA AUTO-BATCH™ HIGH-FLOW METER

Fast. Simple. Safe.™



ORDERING INFORMATION

2"	DPAB-HFM2KITV Viton®	DPAB-HFM2KITE EPDM
3"	DPAB-HFM3KITV Viton®	DPAB-HFM3KITE EPDM

KIT CONTAINS

Valves	Custom Pressure Relief & Electric Valve
Meter	Auto-Batch™ High-Flow Meter
Other	All hose clamps, gaskets, reducer couplings & tees

The Dura Auto-Batch High-Flow Meter is an automated device for transferring fluids. You just enter the amount you want, turn on the pump, and press Start. The meter opens a valve to send the fluid, then closes it when the amount is reached. System requires Dura's specially tuned relief valve kit to function. Can be ordered as a complete kit that includes the meter, valve and relief valve.

Auto-Batch™ Features

- Controls carrier flow using a 12-volt DC electric ball valve
- Easily select manual or automatic operation
- Returns to last volume amount dispensed for easy repeatable batching
- Displays message when batch is completed
- Banjo® EVX® 2" or 3" Valves available for tank bypass system

2" & 3" High-Flow Dura-Meter™

- Intuitive menu-driven backlit display
- Works with non-conductive materials
- Ability to save up to five manual calibrations
- Option to display batch volume, total volume, and flow rate
- Volume measured can be displayed in Liters or Gallons
- Ability to calibrate allows for industry minimum straight line before/after meter*

*See best practices document at duraproducts.com



Moisture sealed circuitry.





2" AND 3" DURA AUTO-BATCH™ HIGH-FLOW METER

Fast. Simple. Safe.™

ORDERING INFORMATION		
2"	DPAB-HFM2V Viton®	DPAB-HFM2E EPDM
3"	DPAB-HFM3V Viton®	DPAB-HFM3E EPDM



ORDERING INFORMATION		
	PRODUCT #	DESCRIPTION
2"	MEVX220-DP	2" Full Port Banjo EVX® Valve with Connector
3"	MEVX300-DP	3" Full Port Banjo EVX® Valve with Connector




ORDERING INFORMATION		
	PRODUCT #	DESCRIPTION
2"	DPAB-HFM2PRV	2" Relief Valve Plumbing Kit
3"	DPAB-HFM3PRV	3" Relief Valve Plumbing Kit

RELIEF VALVE KIT CONTAINS	
Valve	Pressure Relief*
Other	All hose clamps, gaskets, reducer couplings, and tees.

* Custom pressure relief valve

COMPARISON		
Specifications	2"	3"
Nominal Size	2"	3"
Model	DPAB-HFM2	DPAB-HFM3
Connection	M220 flange	M300 flange
Meter Accuracy	+/- 0.5%*	+/- 0.5%*
Fluid Flow Initiates Measurement	Yes	Yes
Battery Size/Voltage	(2) 9 Volt	(2) 9 Volt
Battery Life Indicator	Yes	Yes
Backlit Display	Yes	Yes
Maximum Pressure	150 PSI	150 PSI
Minimum GPM	40	80
Maximum GPM	300	700
Minimum Temp	+ 32 °F	+ 32 °F
Maximum Temp	+ 140 °F	+ 140 °F
Meter Type/Style	Paddlewheel	Paddlewheel
Body Construction Material	GF Polypropylene	GF Polypropylene
Paddle Wheel Bearing	Sapphire	Sapphire

* With manual calibration

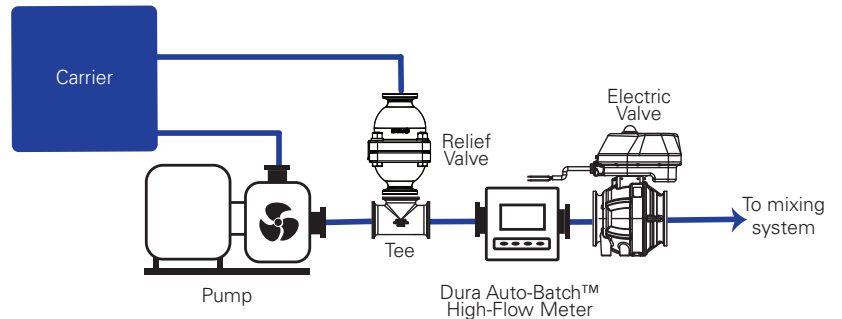

DURA PRODUCTS

Technology with Lasting Value

www.DuraProducts.com

Arcadia, IN 46030 | (317) 984-4003



Scan for more info.

DPAB-HFM_SalesSheet_052024