




DURA PRODUCTS



FASTBATCH
MULTIJET

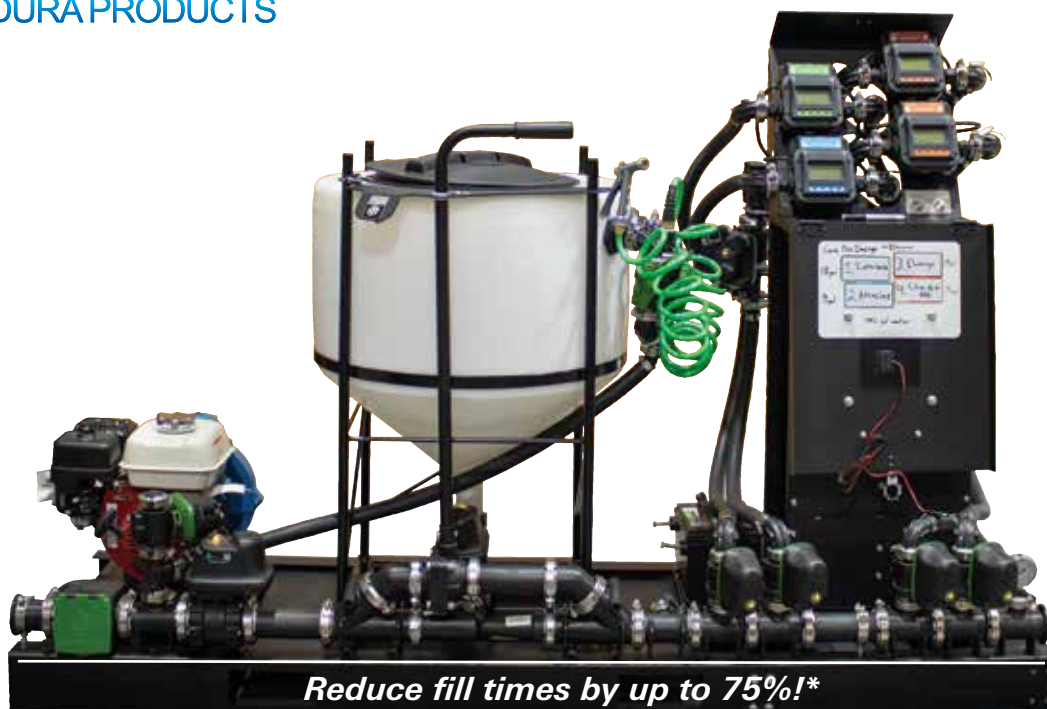

*Reduce fill times by up to 75%!**

The Fastest, Simplest, Safest Way to Mix & Spray

Take your mixing and spraying operations to the next level with the **NEW** FastBatch™ Multijet system, *the only automated sprayer fill system with integrated chemical recirculation*, helping maintain product suspension while reducing manual handling and simplifying operation.

FAST.

- Precise mixing ensures every batch meets your specifications for unmatched accuracy.
- The only sprayer fill system with an integrated chemical recirculation preset that keeps chemical in suspension, ready to batch when you are.

SIMPLE.

- Updated, easy-to-use master controls
- New, simplified meter menu controls
- Ergonomic controls on the venturi for more comfortable operation.
- Inductor tank valve now controlled by a push button for easier operation.
- Reduced wiring complexity for a more reliable electrical system.

SAFE.

- Automatic transfer pump shut off simplifies operation and helps protect equipment.
- Color-coded meter labels, magnetic labels, and valve handles for quick fluid identification and cross contamination prevention

* Based on standard cone/venturi systems with 4 bulk inputs taking 20 minutes (VOC) vs 5 minutes for the FastBatch Multijet

ORDERING INFORMATION

PRODUCT #	DESCRIPTION
DPFB-MULT2V4-12	2" 12VDC 4-Input Fastbatch Multijet System Viton® No Pump
DPFB-MULT3V4-12	3" 12VDC 4-Input Fastbatch Multijet System Viton® No Pump
DPFB-MULT2V2-12ADD	2" 12VDC 2-Input Fastbatch Multijet Add-On
DPFB-MULT2V4-12ADD	2" 12VDC 4-Input Fastbatch Multijet Add-On
DPFB-MULT3V2-12ADD	3" 12VDC 2-Input Fastbatch Multijet Add-On
DPFB-MULT3V4-12ADD	3" 12VDC 4-Input Fastbatch Multijet Add-On

PART NUMBER TAXONOMY INFORMATION

DPFB-MULT3V4-12	DIGIT OPTION	DESCRIPTION
DPFB-MULTX	2	2" Plumbing
	3	3" Plumbing
DPFB-MULT3X	V	Viton®
	E	EPDM
DPFB-MULT3VX	4	4 input version
DPFB-MULT3V4-XX	12	12 volt DC
DPFB-MULT3V4-12-XX	Add TP at end	Transfer Input with Honda® Engine and Silicon Carbide seal
	Add WSTP at end	John Blue® Transfer Input with Honda® Engine and Wet Seal


Dura recommends the NOCO®, GenPro 10X1 charger to connect a 12V battery system for static 110V installation/operation.

Fast. Simple. Safe.™



Updated System Controls & Meter Menu Controls

- Master On/Off push button conveniently controls power to the entire system
- Recirculate button allows for recirculation of all fluids by a custom amount
- New simplified meter menu controls

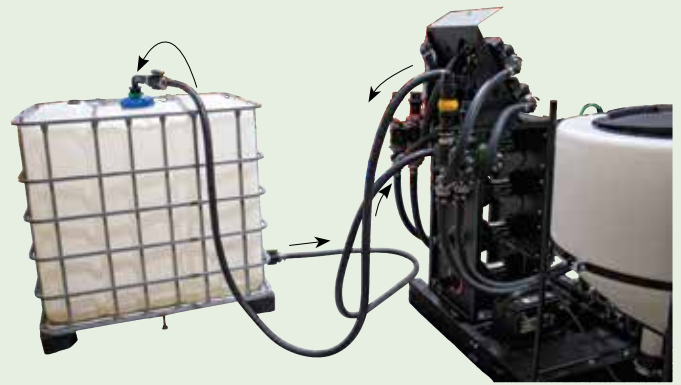

Updated Integrated Recirculation System

- Automatically recirculate all fluids, by a custom amount, with the push of a button.
- Hoses can stay connected at all times, system is completely closed during batching and recirculation.
- Recirc button only works when meter is on "Main Menu" screen to prevent accidental operation.
- Recirculation can be stopped at any time by pushing "Stop" on meter(s) or by pushing the power button "OFF".



Easy Visual Plumbing Connections

- Color-coded meter labels, magnetic labels, and valve handles for quick fluid identification and cross contamination prevention.



- Whiteboard for extra note taking.




Ease of Use Improvements

- Frame modified for easier pump servicing.
- Automatic transfer pump shut-off.
- Inductor tank valve now controlled by a push button for easier operation.
- Ergonomic handle to open/close the manual valve on the venturi.
- Reduced wiring complexity for a more reliable electrical system.

SPECIFICATIONS

Main Plumbing Size	2" or 3"
Meters	Auto-Batch™ High-Flow & Auto-Batch™ Meters
Voltage	12 Volt DC
Connections	M100-M220-M300 Flanges
Calibration Connection	Dry Poppets
Cone	40 gallon w/chem knife & rinse set up
Max Pressure Carrier Line	150 PSI
Max Pressure Chemical Meters	40 PSI
Storage Temp	-40° to 185° F (-40° C to 85° C)
Operating Temp	32° to 158° F (0° C to 70° C)
Wetted Materials	Glass Filled Polypropylene, 304 & 316 Stainless Steel, PTFE & Carbon Graphite filled PTFE, EPDM, Viton™, Ryton™, Santoprene, PVDF, Kynar™
System Dimensions	93"L x 37"W

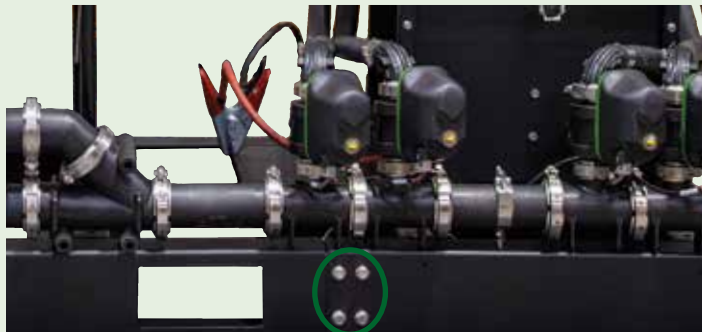

Reconfigure frame sections for flexible installation by removing these bolts.



DURA PRODUCTS

Technology with Lasting Value

www.DuraProducts.com

Arcadia, IN 46030 | (317) 984-4003